

Light Commercial & Commercial, Residential CONTROL SYSTEM & OPTIONAL PARTS

- C-002 Control System Overview
- C-006 Best Control Solution for Each Building Structure
- C-008 Comparison Table of Controllers
- C-054 Optional Parts Overview

A wide product lineup to meet a variety of needs

We can flexibly meet customer needs through a variety of offerings including wired and wireless individual remote controllers, central remote controllers that simultaneously control multiple indoor units, and a variety of converters that link with other systems.

CONTROL SYSTEM



INDIVIDUAL CONTROL

- C-010 Wired Remote Controller (with touch panel)
- C-012 Wired Remote Controller Compact Wired Remote Controller
- C-013 Simple Remote Controller

CONVERTERS/ADAPTERS

- C-014 WLAN Adapter
- C-015 MODBUS® Converter KNX® converter
- C-016 MODBUS® Interface
- C-017 KNX® Interface
- C-018 WLAN Adapter
- C-019 Multi-split Protocol WLAN Adapter
- C-020 BACnet® Gateway External switch controller



INDIVIDUAL CONTROL

- C-021 Wired Remote Controller
- C-022 Wireless Remote Controller
- C-023 IR Receiver Unit

CENTRALIZED CONTROL

- C-024 Central Remote Controller

CONVERTERS/ADAPTERS

- C-025 Network Converter for Single-Split Type



INDIVIDUAL CONTROL

- C-026 Wireless Remote Controller IR receiver unit for Duct and Cassette type

CENTRALIZED CONTROL

- C-028 Central Remote Controller
- C-030 Touch Panel Controller
- C-034 System Controller **Software** System controller Lite **Software**

CONVERTERS/ADAPTERS

- C-038 BACnet® Gateway **Software**
- C-039 BACnet® Gateway **Hardware** Multiple protocol LAN adapter
- C-040 BACnet®/MODBUS® Router
- C-041 BACnet®/MODBUS® Cloud Device
- C-042 MODBUS® Converter
- C-043 KNX® Converter
- C-044 Signal Amplifier Network Converter for LONWORKS®

- C-046 Control System List

Optional parts



- C-056 Silver Ion Filter
- C-057 Auto Louver Grille Kit



- C-058 Pressure Sensor Kit
- C-059 External Power Supply Unit

- C-059 AIR BEAM Radiation air outlet unit
- C-060 Optional Parts List
- C-064 Function List
- C-068 Separation Tube and other piping products



SPLIT



MULTI-SPLIT



VRF J Series



VRF V Series

Control System Overview

for Split & Multi-split

All indoor units* are equipped with a wireless or wired remote controller as standard. Additional options are available, such as individual remote controllers and central remote controllers. The easy-to-operate central remote controller makes it simple to control the operation mode, temperature, airflow volume, timer, and other functions of each indoor unit from a single location.

* Except for some products



Air Conditioning Individual control



Wired remote controller
A built-in thermo sensor monitors and controls room temperature accurately.



Wireless remote controller
Simple and versatile operations with a choice of 4 different types of timers




Simple remote controller
Compact remote controller with basic functionality

For Ceiling type



IR receiver unit

For Duct type



IR receiver unit


For Cassette type



IR receiver unit

This IR receiver unit enables a wireless remote controller to control a duct-type indoor unit.

Air Conditioning Centralized control



Central remote controller for 5, 6 & 8-unit Multi-split type
Enables individual and central control.

Converters/Adapters

For external control via BMS/Home Automation Systems

MODBUS® converter for indoor units
UTY-VMSX



MODBUS® interface for indoor units



KNX® converter for indoor units
UTY-VKSX



KNX® interface for indoor units



WLAN adapter



Network converter

DC power supply type
UTY-VTGX



AC power supply type
UTY-VTGXV



Online Control (Wireless Control via Smartphone/Tablet)

With the WLAN adapter and the FGLair app, you can control the heating and cooling of your home anytime, anywhere.

WLAN adapter

The dedicated WLAN adapter enables the air conditioner to be operated by smartphone or tablet computer from outside the home.




WLAN adapter USB



Simple, user-friendly interface design

The designed screen display makes it easier than ever to operate.

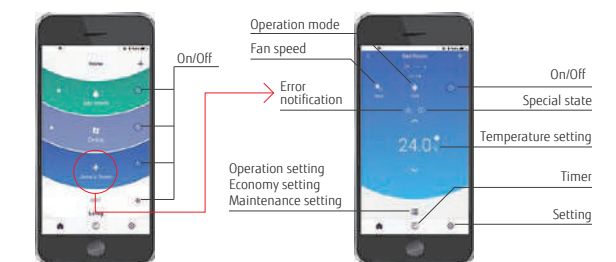

Control System Overview

for VRF

To meet the diverse needs of customers, we offer a variety of control options for our VRF systems, such as individual control, centralized control, and building management system (BMS) options.

Air Conditioning Individual control



Wired remote controller (with touch pane)
UTY-RNRYZ5



Wired remote controller
UTY-RLRY



Compact wired remote controller
UTY-RCRYZ1



Simple remote controller
UTY-RSRY
UTY-RHRY
Without operation mode



Wireless Remote Controller
UTY-LNHY



IR receiver unit
UTB-YWC for duct type

For Duct type


For One-way flow cassette Series/ 3D-flow cassette Series/duct type

UTY-TRHX for One-way flow cassette Series 3D flow cassette Series/duct type

UTY-LRHYB1 for cassette type

UTY-LBHDX for Circular flow cassette Series


Air Conditioning Centralized control

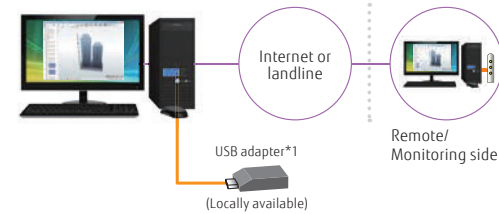

System controller (Software)
UTY-APGXZ1/UTY-ALGXZ1 (Lite version)

Up to 1600^{*2} Indoor units

*1: Echelon® U10 USB Network Interface
*2: The Lite version controls up to 400 indoor units.

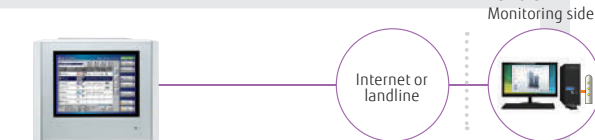

Touch panel controller
UTY-DTGYZ1

Up to 400 Indoor units



Central remote controller
UTY-DCGYZ2

Up to 100 Indoor units



Converters/Adapters

For external control via BMS/Home Automation Systems


BACnet® gateway (Software)
UTY-ABGXZ1



BACnet® gateway (Hardware)



Network converter (For LONWORKS®)
UTY-VLGX



MODBUS® converter for indoor units
UTY-VMSX



MODBUS® converter



KNX® converter for indoor units
UTY-VKSX



KNX® converter for VRF





WLAN adapter
UTY-TFSXZ1



External switch controller
UTY-TERX



Card-key (Locally available)

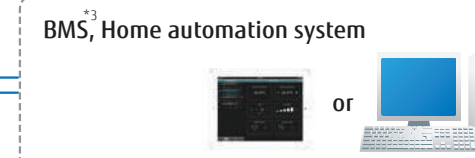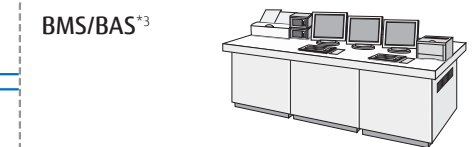

*3: BMS/BAS: Building Management System/Building Automation System

Converters/Adapters for system expansion

Network converter DC power supply type
UTY-VTGX



Network converter AC power supply type
UTY-VTGXV











Signal amplifier
UTY-VSGXZ1














Best control solution for each building structure

Fujitsu General provides the best control solutions suitable for various building structures.











SHOP

Type	Individual control			Centralized control			Integrating control (Interface)		
									
	Wired remote controller	Group remote controller	Central remote controller	Touch panel controller	System controller	Network converter for LONWORKS®	MODBUS® Converter	KNX® converter	
	UTY-RNRYZ5 UTY-RLRY UTY-RVNYM UTY-RCRYZ1	UTY-CGGY	UTY-DCGYZ2	UTY-DTGYZ1	UTY-APGXZ1 UTY-ALGXZ1	UTY-VLGX	UTY-VMGX	UTY-VKGX	
Automatic control of air conditioning (Schedule timer, Weekly timer, etc.)	•	•	•	•	•				
Controls limited to staff: Remote controller prohibition, Setting temperature range limitation, etc.			•	•	•	•	•	•	
Group control		•	•	•	•				
Advanced energy saving: Peak cut, Operation of indoor unit rotation, etc.					•				
Remote monitoring management			•	•	•				
Manage multiple sites			•	•	•				
Monitor energy consumption					•				
Control third-party products					•				
Integrate Fujitsu General air conditioning into BMS						•	•	•	















HOTEL

Type	Individual control			Centralized control			Integrating control (Interface)				
											
	Wired remote controller	Simple remote controller	Wireless remote controller	Central remote controller	Touch panel controller	System controller	BACnet® gateway	Network converter for LONWORKS®	MODBUS® converter	KNX® converter	External switch controller
	UTY-RNRYZ5 UTY-RLRY UTY-RCRYZ1	UTY-RSRY UTY-RHRY UTY-RSNYM	UTY-LNHY UTY-LNTY	UTY-DCGYZ2	UTY-DTGYZ1	UTY-APGXZ1 UTY-ALGXZ1	UTY-ABGXZ1 UTY-VBGX	UTY-VLGX	UTY-VMGX	UTY-VKGX	UTY-TERX
Local control for hotel guests	•	•	•								
Centralized air conditioning control for common areas				•	•	•	•	•	•	•	
Limited control for hotel guests				•	•	•	•	•	•	•	
Remote monitoring management				•	•	•					
Advanced energy saving: Peak cut, Operation of indoor unit rotation, etc.						•	•				
Monitor energy consumption						•					
Control third-party products						•					
Integrate Fujitsu General air conditioning into BMS							•	•	•	•	
Interlock with window contact											•
Interlock with key card											•

OFFICE

Type	Individual control			Centralized control			Integrating control (Interface)				
											
	Wired remote controller	Simple remote controller	Wireless remote controller	Central remote controller	Touch panel controller	System controller	BACnet® gateway	Network converter for LONWORKS®	MODBUS® converter	KNX® converter	External switch controller
	UTY-RNRYZ5 UTY-RLRY UTY-RCRYZ1	UTY-RSRY UTY-RHRY UTY-RSNYM	UTY-LNHY UTY-LNTY	UTY-DCGYZ2	UTY-DTGYZ1	UTY-APGXZ1 UTY-ALGXZ1	UTY-ABGXZ1 UTY-VBGX	UTY-VLGX	UTY-VMGX	UTY-VKGX	UTY-TERX
Local control for office staff	•	•	•	•							
Automatic control of air conditioning (Schedule timer, Weekly timer, etc.)	•		•	•	•	•	•				
Centralized air conditioning control for management				•	•	•	•	•	•	•	
Controls limited to staff: Remote controller prohibition, Setting temperature range limitation, etc.				•	•	•	•	•	•	•	
Advanced energy saving: Peak cut, Operation of indoor unit rotation, etc.						•	•				
Remote monitoring management				•	•	•					
Electricity charge apportionment					•	•	•				
Monitor energy consumption						•					
Control third-party products						•					
Integrate Fujitsu General air conditioning into BMS							•	•	•	•	
Interlock with door contact											•
Interlock with Human sensor for meeting room				•							•

Comparison table of controllers

Item																
	Wired remote controller (with touch panel)	Wired remote controller	Wired remote controller	Compact wired remote controller	Simple remote controller	Simple Remote Controller		Simple remote controller*1	Wireless remote controller	Wireless remote controller	Central remote controller (for 8-unit multi-split type)	Central remote controller	Touch panel controller	System controller Lite Software	System controller Software	
Model name	UTY-RNRYZ5	UTY-RLRY	UTY-RVNYM	UTY-RCRYZ1	UTY-RSNYM	UTY-RSRY		UTY-RHRY	UTY-LNHY	UTY-LNTY	UTY-DMMYM	UTY-DCGYZ2	UTY-DTGVZ1	UTY-ALGXZ1	UTY-APGXZ1	
Maximum number of controllable remote controller groups	1	1	1	1	1	1		1	1	1	1	100	400	400	1600	
Maximum number of controllable indoor unit	16	16	16	1	16	16		16	16	16	8	100	400	400	1600	
Maximum number of controllable group	-	-	-	-	-	-		-	-	-	-	50	400	400	1600	
Air conditioning control functions	ON/OFF	●	●	●	●	●		●	●	●	●	●	●	●	●	
	Operation mode setting	●	●	●	●	●		-	●	●	●	●	●	●	●	
	Fan speed control	●	●	●	●	●		●	●	●	●	●	●	●	●	
	Room temperature setting	●	●	●	●	●		●	●	●	●	●	●	●	●	
	Setting temperature range limitation	●	●	●	-	-		●	-	-	-	●	●	●	●	
	Test operation	●	●	●	●	●		●	●	●	-	-	●	-	-	
	Vertical louver setting	●	●	●	●	-		●	●	●	-	●	●	●	●	
	Horizontal louver setting	●	●	●	●	-		-	●	-	-	●	●	●	●	
	Individual louver control	●	-	-	●	-		-	-	-	-	●*3	●	-	-	
	Group setting	-	-	-	-	-		-	-	-	-	●	●	●	●	
	Remote controller prohibition	-	-	-	-	-		-	-	-	●	●	●	●	●	
	Anti-freeze setting	●	-	-	●	-		-	-	-	-	●	●	●	●	
	Set temperature auto return	●	●	●	-	-		-	-	-	-	-	●	-	-	
	Economy mode setting	●	●	●	●	-		-	●	●	●	●	●	●	●	
	Human sensor control	●	-	-	-	-		-	-	-	●	●	●	●	●	
Displayed items	Error	●	●	●	●	●		●	-	-	●	●	●	●	●	
	Defrosting	●	●	●	●	●		●	-	-	-	●	●	●	●	
	Current time	●	●	●	-	-		-	●	●	●	●	●	●	●	
	Day of week	●	●	●	-	-		-	-	-	-	●	●	●	●	
	Remote controller prohibition	●	●	●	●	●		●	-	-	●	●	●	●	●	
	Address display	●	●	●	●	●		●	-	-	-	-	●	●	●	
	Room temperature	●	-	●	●	-		●	-	-	-	●*4	●*4	●*4	●*4	
	Multiple language support	●	-	●	-	-		-	-	-	●	●	●	●	●	
	Setting for daylight saving time	●	-	●	-	-		-	-	-	●	●	●	●	●	
	Name registration	●	-	-	-	-		-	-	-	-	●	●	●	●	
	Backlighting	●	-	●	●	●		●	-	-	●	●	●	-	-	
	2D floor layout/3D building display	-	-	-	-	-		-	-	-	-	-	-	-	●	
	Refrigerant leak detector	-	-	-	-	-		-	-	-	-	●	●	●	●	
	Timer	Schedule timer	Period	Week	Week	Week	-		-	-	-	Week	Week	Year	Year	Year
			ON/OFF, Temp, Mode, Times per day	8	4	8	-		-	-	-	4	20	20	144	144
ON/OFF timer		●	●	●	●(OFF only)	-		-	●	●	-	-	-	-	-	
Sleep timer		-	-	-	-	-		-	●	●	-	-	-	-	-	
Program timer		-	-	-	-	-		-	●	●	-	-	-	-	-	
Auto-off timer		●	●	●	-	-		-	-	-	-	●	●	-	-	
Control	Day off	●	●	●	-	-		-	-	-	●	●	●	●	●	
	Minimum unit of timer setting (minutes)	10 • 30	30	30	-	-		-	5	5	5	10	10	10	10	
	Remote monitoring management system	-	-	-	-	-		-	-	-	-	●	●	●	●	
	Electricity charge apportionment	-	-	-	-	-		-	-	-	-	-	○	○	●	
	Error history	●	●	●	-	-		-	-	-	-	●	●	●	●	
	Emergency stop	-	-	-	-	-		-	-	-	-	●*2	●*2	-	-	
	Remote monitoring management	-	-	-	-	-		-	-	-	-	●	●	○	●	
	Energy-saving management	-	-	-	-	-		-	-	-	-	-	-	○	○	
	E-mail notification in case of failure	-	-	-	-	-		-	-	-	-	●	●	●	●	
	Key lock	● Child lock	● Child lock	● Child lock	-	-		-	-	-	-	● Child lock	● Password setting	● Password setting	● Password setting	● Password setting
	Low noise mode	-	-	-	-	-		-	-	-	-	●	●	●	●	
	Multi System Control	●	-	-	-	-		-	-	-	-	-	-	-	-	

*1 "Operation mode" setting not available. *2 Available only for external input control.
 *3 Equipped only with individual air volume batch reset. *4 Available only when using Wired remote controller.
 ●: Supported ○: Optional function -: Unsupported

Wired remote controller (with touch panel)

UTY-RNRYZ5



NEW



Up to 16 indoor units

Up to 1 group

Easy operation due to large high-resolution STN-LCD touch panel screen

- Touch screen LCD
- Built-in daily/weekly timer (ON/OFF, temperature, modes)
- Backlit screen for easy operation in the dark.
- Room temperature display
- Controls up to 16 indoor units
- Supports 12 languages: Chinese, Dutch, English, French, German, Greek, Italian, Polish, Portuguese, Russian, Spanish, and Turkish
- nonpolar 2-core type


High performance and compact size

A single remote controller controls each connected indoor unit and provides a weekly timer function and a variety of energy-saving options.



Accurate control for comfort

A thermo sensor built into the remote controller monitors room temperature accurately.

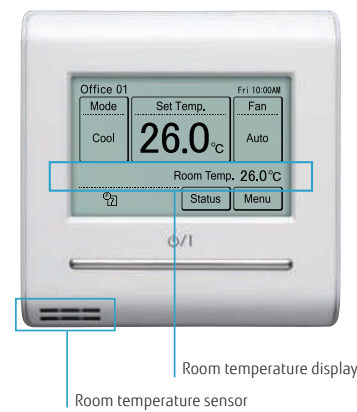

Energy saving controls

Custom Auto

- Maintains 2 separate setpoints for heating and cooling operations.
- Automatically switches between heating and cooling modes.

* Not available for some models

Auto-off timer



- While the Auto-timer is activated, if the set off time is specified as, for example, one hour, the power will automatically turn off one hour after the start of operation.
- A desired time frame can be specified for the Auto-off timer.
- The off-time can be set from 30 to 240 minutes.

2-setting weekly timer

Set temperature auto return

Setting temperature range limitation

Cooling set temp. 27°C, Heating set temp. 26°C

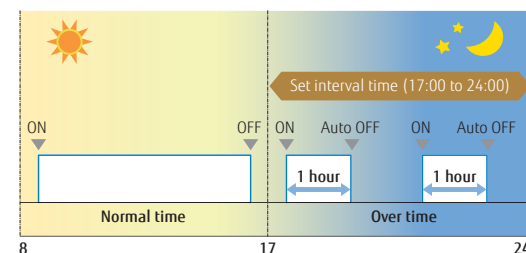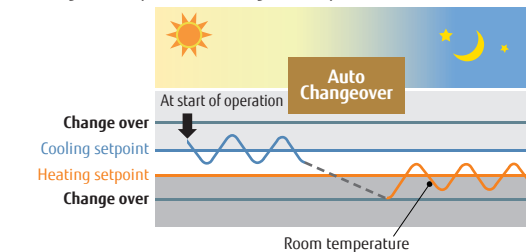

e.g.) Between 17:00 and 24:00 (over time hours), when the 1 hour set off time has elapsed, the system will automatically turn off the indoor unit as it

Features: Wired Remote Controller (Touch Panel)

NEW Multi System Control*1 *2


1) Lead Lag Operation

Standby Indoor Unit can be selected in lead lag operation. By this, the Indoor units will last longer than operating by nonstop.



*1: It is necessary to select an indoor unit when actually operating in the server room.
*2: It is not a function that guarantees the server will not fail.

*XX

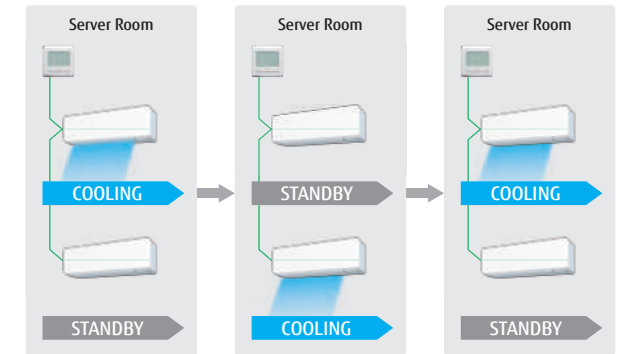


Example and Control Functions

Operation mode: Cooling
Setting temp.: 24°C
Airflow: High
Max. No. indoor units: depends on indoor unit
No. of Standby IDUs*: 1 or 2 units
Rotation Interval: 1-7 days
Operation Overlap Time*: None / 10 / 20 / 30 min

*No. of Standby Indoor units and operation overlap time can be changed from wired remote controller.

2) Back up operation

In case of unexpected Indoor unit error, other Indoor units will start providing back up operation.

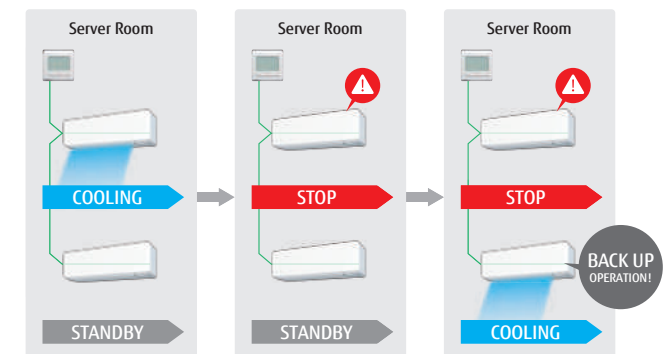


Example and Control Functions

Operation mode: Cooling
Setting temp.: 24°C
Airflow: High
Max. No. indoor units: depends on indoor unit
No. of back-up IDUs*: 1 or 2 units

*No. of back-up Indoor units can be changed from wired remote controller.

3) Lag Operation

In case of unexpected Indoor unit error, other Indoor units will start providing back up operation.

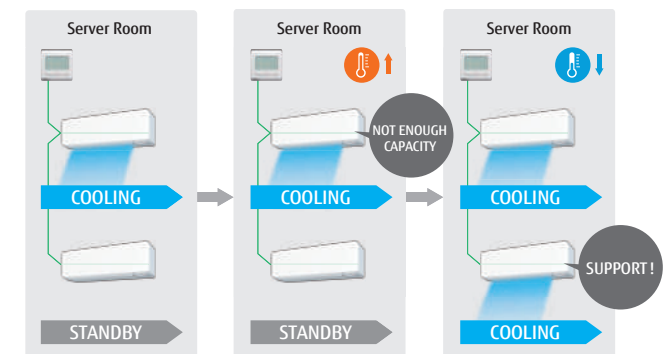

Example and Control Functions

Operation mode: Cooling
Setting temp.*: 24°C
Support Operation Start: 26.5°C (setting temp +2.5°C)
Support Operation Stop: 24.5°C (setting temp +0.5°C)

*Setting temperature can be changed from wired remote controller.

Specifications

Model name	UTY-RNRYZ5
Power Source	DC 12 V
Dimensions (H × W × D) (mm)	120 × 120 × 20.4
Weight (g)	220

DC 12 V is supplied by the indoor unit.

Wired remote controller

UTY-RLRY



- ON/OFF/Weekly timer settings
- A built-in thermo sensor monitors and controls room temperature accurately.
- When something goes wrong, an error code is displayed.
- 16 error codes from the most recent one will be kept in the history. (Last 16 error codes can be accessed)
- nonpolar 2-core type

High performance and compact size

A single remote controller controls each connected indoor unit and provides a weekly timer function and a variety of energy-saving options.




Up to 16 indoor units

Up to 1 group


Visually intuitive operation

- The operation mode, set temperature, and fan speed are shown prominently on the top screen.
- Each function to be set is indicated by an icon.
- The control guide makes it simple and straightforward to operate a remote controller.

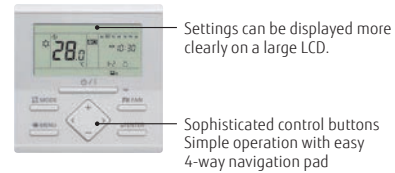

Compact wired remote controller


UTY-RCRYZ1



- Simple design that matches stylish interiors
- The body of the controller, which is easy to install, is designed to conform to the European standard junction box.
- Can be operated both by wireless and wired remote controller.
- nonpolar 2-core type


Large screen and simple display

- Large screen but compact size
- Large, easy-to-read letters are used.
- The controls are simple and easy to understand.

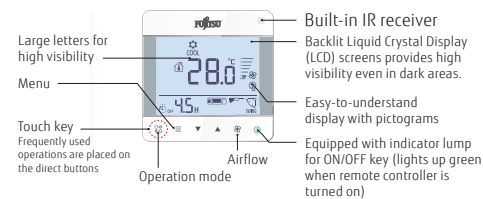


System overview

VRF connection

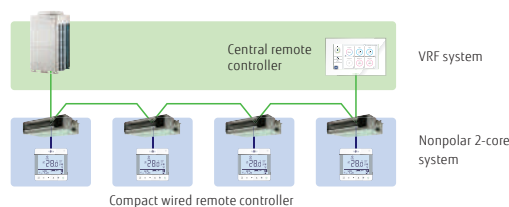

RAC connection




Specifications

Model name	UTY-RLRY	UTY-RCRYZ1
Power source	12 V DC	12 V DC
Dimensions (H × W × D) (mm)	120 × 120 × 17	86 × 86 × 44
Weight (g)	170	135

12 V DC supplied by an indoor unit

Simple remote controller

UTY-RSRV/UTY-RHRY (without operation mode)



Compact remote controller with basic functionality


- Up to 16 indoor units can be controlled with one remote controller.
- Suitable for hotels or offices as it is easily operated with no complex functions.
- Simple design that matches stylish interiors
- Large LCD screen and easy-to-use control buttons
- Backlight: White backlight makes it easy to operate in the dark.
- nonpolar 2-core type

Up to 16 indoor units

Up to 1 group


Supports a variety of applications

- **Vertical louver control:** Adjusts the vertical airflow direction of a duct-type indoor unit with an auto louver or a cassette type installed in a hotel room or a conference room.
- **Setting temperature range limitation:** Enables an indoor unit to operate in an energy-saving manner in a small building not equipped with a central remote controller.
- **Built-in room temperature sensor:** Monitors and controls room temperature accuracy.



Simple remote controller

UTY-RSNYM, UTY-RSKY/UTY-RHKY (without operation mode)



Compact remote controller with basic functionality

- Up to 16 indoor units can be controlled with one remote controller.
- Suitable for hotels or offices as it is easily operated with no complex functions.
- Backlit screen for easy operation in the dark.
- polar 3-core type

Up to 16 indoor units

Up to 1 group

Easy-to-use operation

- Enables basic control of an indoor unit, such as ON/OFF, fan speed, operation mode select, and room temperature setting.
- A large ON/OFF button is located in the middle for quick access.
- Works with other individual control units.
- When something goes wrong, an error indicator will appear, and diagnostics can be performed with the remote controller.

Specifications

Model name	UTY-RSRV	UTY-RHRY	UTY-RSNYM, UTY-RSKY	UTY-RHKY
Power source	12 V DC	12 V DC	12 V DC	12 V DC
Dimensions (H × W × D) (mm)	120 × 75 × 19.4	120 × 75 × 19.4	120 × 75 × 19.4	120 × 75 × 14
Weight (g)	120	120	120	90

12 V DC supplied by an indoor unit

WLAN adapter

UTY-TFNXZ1/UTY-TFSXZ1, UTY-TFSXW1, UTY-TFSXF2




USB type for single-split models
UTY-TFSXF2



UTY-TFNXZ1 (3-wire RC-line type) (CN connector type)
UTY-TFSXZ1 (CN connector type)


Up to
1 indoor unit

- This interface provides the most advanced solution for the remote management of an air conditioning system by using smartphones, tablets, and computers.
- No separate external power supply required
- Can be used for a single indoor unit and multi-split indoor units.

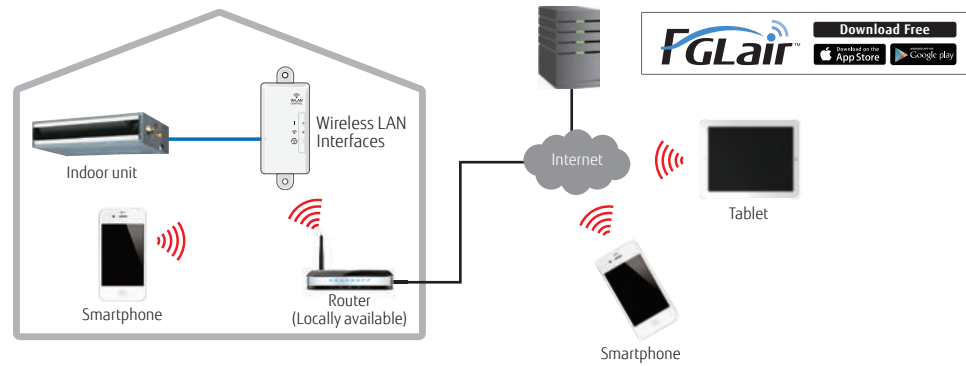


Basic control

- Turning the units on and off
- Mode control (Heat, Cool, Dry, Auto, Fan)
- Fan speed control
- Louver position (airflow direction setting)
- Timer operation setting (Weekly timer)
- Economy mode setting

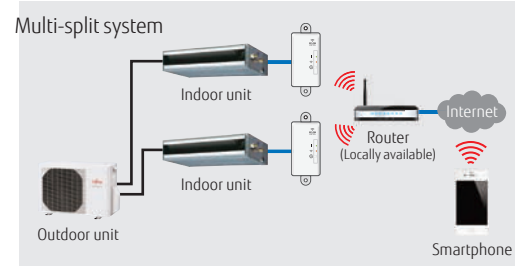


Multiple air conditioning management

- Manage multiple air conditioning systems in different locations.

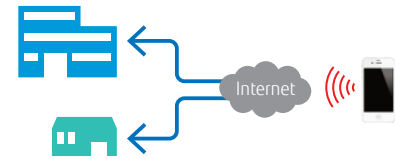

Error alert and e-mail notice

- E-mail notification alerts
- Air conditioning malfunction alert
- Enables quick service response when errors occur.

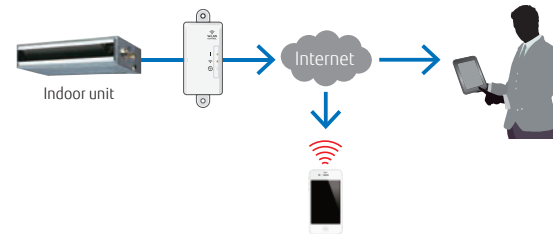

WLAN adapter (USB type) UTY-TFSXF2

A compact USB type is available. No need for specialized installation. Easily installed on the indoor unit.



Specifications

Model name	UTY-TFNXZ1 (3-wire RC-line type)	UTY-TFSXZ1 (CN connector type)	UTY-TFSXW1 (CN connector type)	UTY-TFSXF2
Dimensions (H × W × D) (mm)	71 × 38 × 15	71 × 38 × 15	71 × 38 × 15	56.7 × 34 × 9.72
Weight (g)	35	35	35	30

MODBUS® converter for Indoor unit


UTY-VMSX



Up to
1 indoor unit

MODBUS® converter enables air conditioners to be fully integrated into a MODBUS® network.

- Simple installation due to small and compact size.
- No separate external power supply required.
- The MODBUS® converter must be connected to an indoor unit on a one-to-one basis.
- The MODBUS® converter enables central monitoring and control of air conditioners from BMS, central, or home controller.

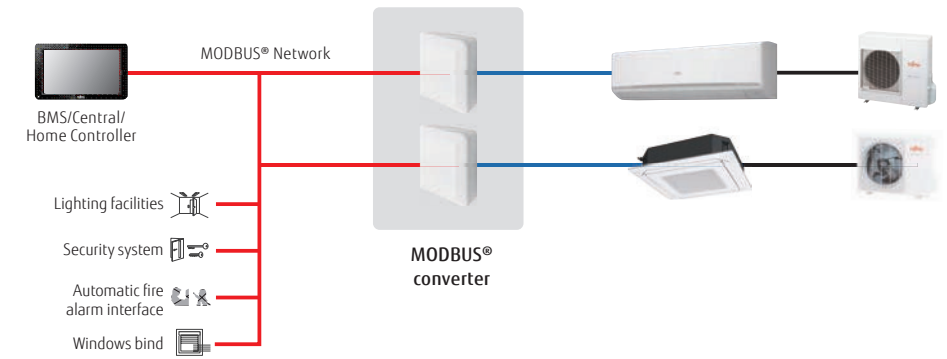


Basic control

- Turning the units on and off
- Mode control (Heat, Cool, Dry, Auto, Fan)
- Fan speed control
- Louver position (airflow direction setting)
- Room temperature setting and display
- Economy mode setting
- Error status

Easy Installation

Easy to install with minimal wiring and without the need for a power supply cable to the converter

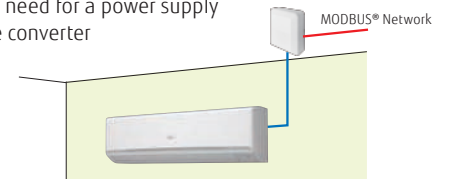

KNX® converter for indoor unit


UTY-VKSX



Up to
1 indoor unit

KNX® Converter enables individual control of an indoor unit.

- The new KNX® converter connects a central or home controller and a Fujitsu General indoor unit.
- Compact and lightweight design

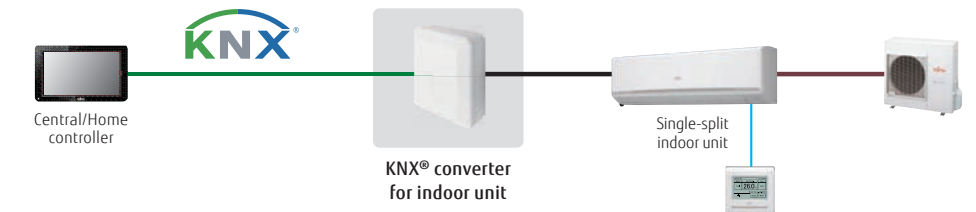

Specifications

Model name	UTY-VMSX
Power supply	12 V DC
Input power (W)	Max. 1.2 W
Dimensions (H × W × D) (mm)	140 × 117 × 43
Weight (g)	200
Maximum number of connectable indoor units per MODBUS® converter	1

Modbus communication specifications

Transfer mode	RTU mode
Communication speed	9600/19200 bps
Data bit	8
Parity	even/odd/none
Stop bit	1/2 (no parity)
Network	RS485
Maximum cable length	1000 m (3280 ft)

Model name	UTY-VKSX
Power supply	12 V DC
Power consumption (W)	0.6
Dimensions (H × W × D) (mm)	140 × 117 × 43
Weight (g)	215

MODBUS® interface

FG-RC-MBS1Z1/FG-AC-MBS1Z1



FG-RC-MBS1Z1
(3-wire RC-line type)

NEW




FG-AC-MBS1Z1
(CN connector type)

MODBUS® interface enables air conditioners to be fully integrated into a MODBUS® network.

- Small, compact, and easy to install on DIN rails.
- No separate external power supply required.
- MODBUS® interface enables central monitoring and control of air conditioners from BMS.

Installation example

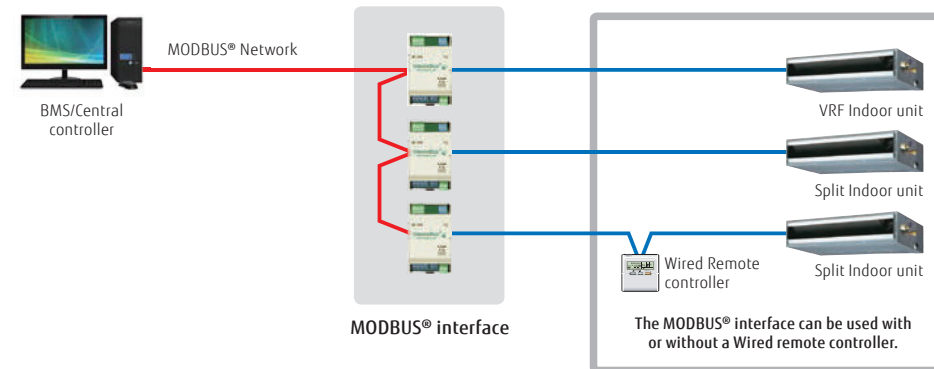

Up to
1 indoor unit

Specifications

Model name	FG-RC-MBS1Z1 (3-wire RC-line type)	FG-AC-MBS1Z1 (CN connector type)
Number of controllable groups	1	1
Dimensions (H × W × D) (mm)	93 × 53 × 58	93 × 53 × 58
Weight (g)	85	85

KNX® interface

FG-RC-KNX1Z1/FG-AC-KNX1Z1/FG-IR-KNX1Z1



FG-RC-KNX1Z1
(3-wire RC-line type)

NEW



FG-AC-KNX1Z1
(CN connector type)

NEW




FG-IR-KNX1Z1
(IR type)

The KNX® interface enables air conditioners to be fully integrated into a KNX® network system.

- Simple installation due to small and compact size.
- No separate external power supply required (only KNX® bus power required)


Installation example

[3-wire RC-line type/CN connector type]

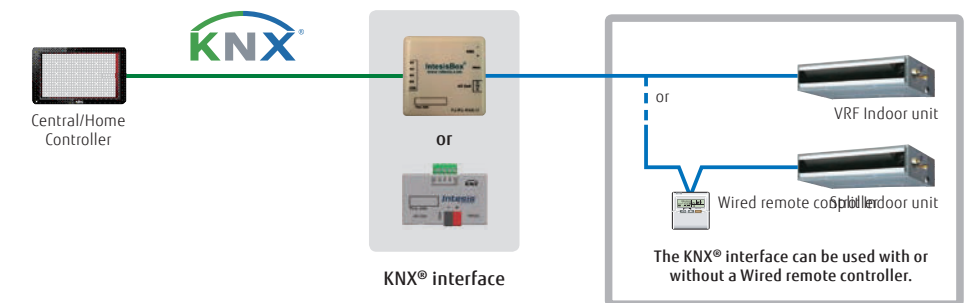


Up to
1 indoor unit

[IR type] Connection to wall-mounted type

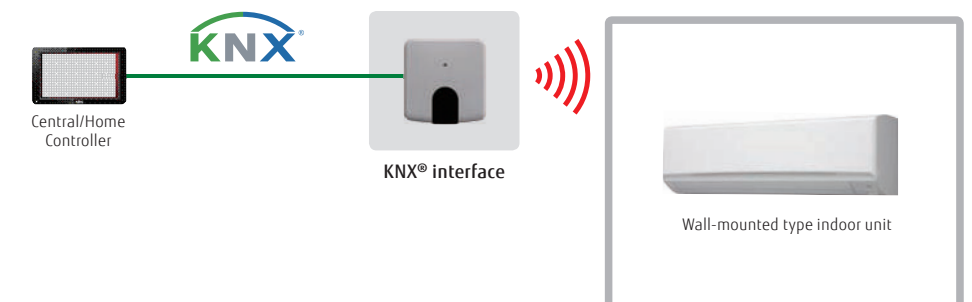

[IR type] Connection to a product other than wall-mounted type

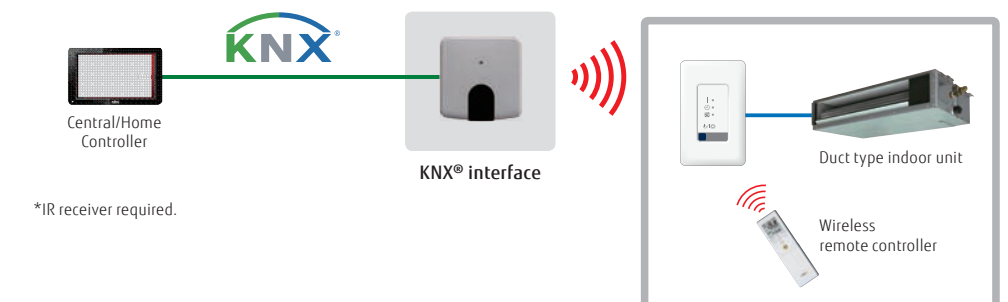

Specifications

Model name	FG-RC-KNX1Z1 (3-wire RC-line type)	FG-AC-KNX1Z1 (CN connector type)	FG-IR-KNX1Z1 (IR type)
Number of controllable groups	1	1	1
Dimensions (H × W × D) (mm)	70 × 70 × 28	45 × 59 × 21	81 × 78 × 28
Weight (g)	70	35	76



WLAN adapter

FG-RC-WIF1Z2/FG-IR-WIF1Z1/FG-AC-WIF1Z1




FG-RC-WIF1Z2
(3-wire RC-line type)

AC Cloud Control


- This interface provides the most advanced solution for the remote management of an air conditioning system by using smartphones, tablets, and computers.
- No separate external power supply required

Installation example


[3-wire RC-line type/CN connector type]

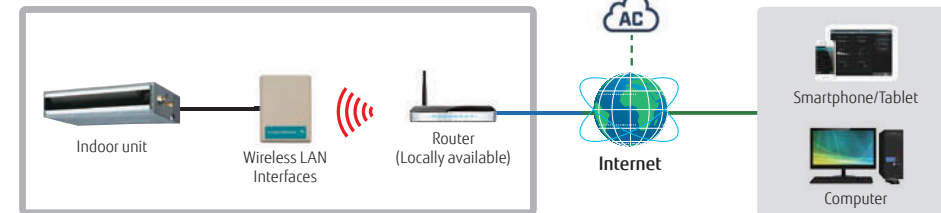

[IR type] Connection to wall-mounted type

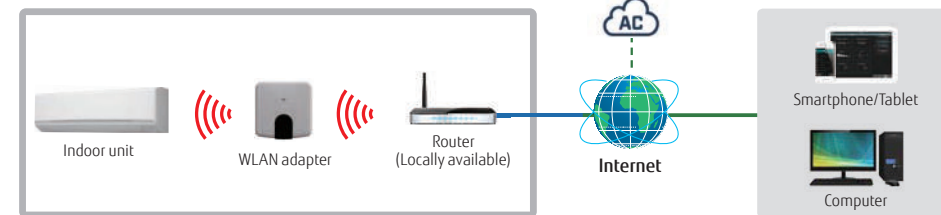

[IR type] Connects to the product with the optional receiver kit

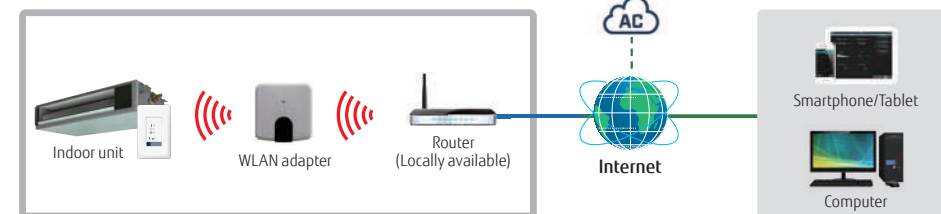

*IR receiver required.

Basic control

- Turning air conditioner on and off
- Mode select (Heat, Cool, Dry, Auto, Fan)
- Louver position (airflow direction setting)
- Fan speed control
- Room temperature display
- Setting temperature
- Multiple language support
- One single scene is created.

Advanced control (optional functions)

- Climate-based operation modes (ECO, Comfort, and Powerful) (to be available in the future)
- Schedule functions (ON/OFF, modes, set temperature, fan speed, louver position)
- Setting temperature range limitation
- Multiple Scenes and Calendars are created.
- Smart Speaker compatibility
- Advanced internet service connections

Notification and operation history

- E-mail notification alerts
- Air conditioning malfunction alert
- Connectivity monitoring and alert
- Operation history (to be available in the future)

Specifications

Model name	FG-RC-WIF1Z2 (3-wire RC-line type)	FG-AC-WIF1Z1 (CN connector type)	FG-IR-WIF1Z1 (IR type)
Number of controllable groups	1	1	1
Dimensions (H × W × D) (mm)	108 × 70 × 28	81 × 78 × 28	127 × 50 × 17
Weight (g)	80	76	80

Multiple protocol WLAN adapter

FG-RC-WMP1Z1/FG-IR-WMP1Z1/FG-AC-WMP1Z1




FG-RC-WMP1Z1
(3-wire RC-line type)

AC Cloud Control


- Air conditioner control of Home Automation systems via wireless LAN connection.
- No separate external power supply required

Installation example


[3-wire RC-line type/CN connector type]

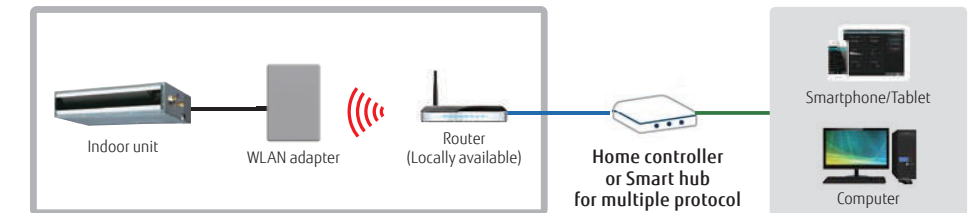

[IR type] Connection to wall-mounted type

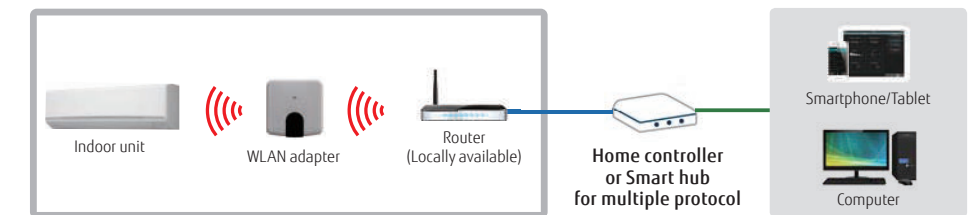

[IR type] Connection to a product other than wall-mounted type

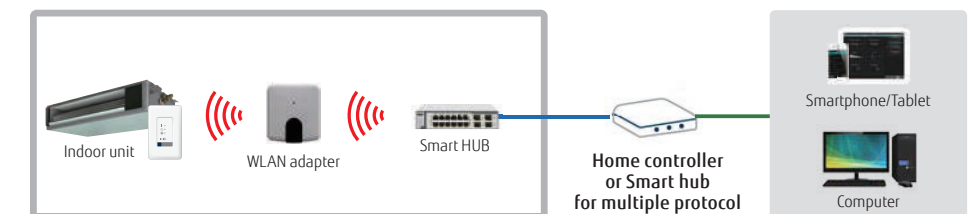

*IR receiver required.

Up to
1 indoor unit

Specifications

Model name	FG-RC-WMP1Z1 (3-wire RC-line type)	FG-AC-WMP1Z1 (CN connector type)	FG-IR-WMP1Z1 (IR type)
Number of controllable groups	1	1	1
Dimensions (H × W × D) (mm)	70 × 100 × 28	127 × 50 × 17	81 × 78 × 28
Weight (g)	98	80	76

BACnet® gateway

FG-AC-BAC1Z1



NEW




FG-AC-BAC1Z1 (CN connector type)

Up to 1 indoor unit

- BACnet® Gateway connects BMS and a Fujitsu General split/multi-split/VRF system.
- Compatible with BACnet® (ANSI/ASHRAE-135-2012) application-specific controller (B-ASC)
- Compatible with BACnet®/IP over Ethernet.

Installation example

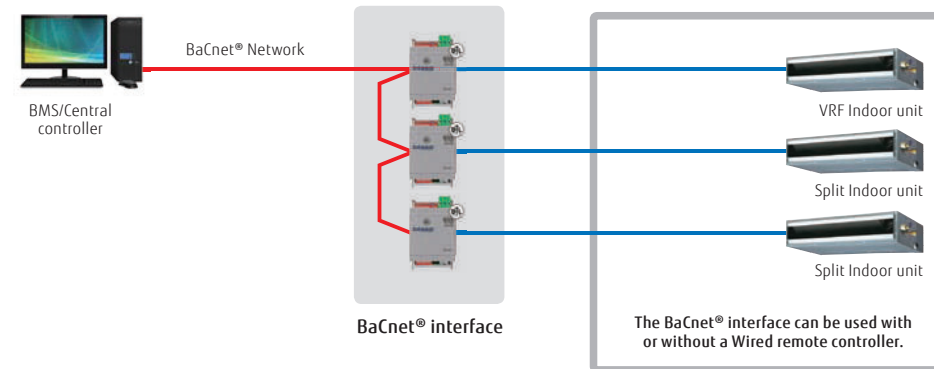

External switch controller

UTY-TERX




Up to 1 group

Air conditioner switching can be controlled by connecting this external switch controller to other sensor switches.

- In combination with a commercially available card-key switch or other sensors, this External switch controller enables the control of ON/OFF, room temperature, and fan speed of connected air conditioners as well as master control functions. This makes this product an ideal choice for use in hotel rooms.
- Card key or other sensor switches are locally available.
- The set temperature can be specified at two points each for cooling and heating operations (4 points in total).

Installation example

Human sensor monitors the movement of a person in a room. When it detects that the person has left the room, it switches the air conditioner to low-capacity mode. When a person returns to the room, the air conditioner returns to the previous operation mode.

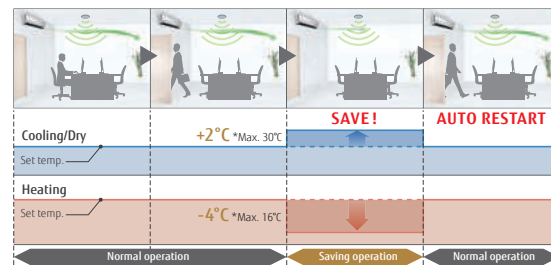

Human sensor equipment needs to be purchased separately. Human sensor is not mounted on an External switch controller.

Specifications

Model name	UTY-TERX	FG-AC-BAC1Z1 (CN connector type)
Power supply	6.5 to 16 V DC	-
Dimensions (H × W × D) (mm)	140 × 117 × 43	93 × 53 × 58
Weight (g)	250	85

12 V DC supplied by an indoor unit

Wired remote controller

UTY-RVNYM



Up to 16 indoor units


Up to 1 group

Hi-grade individual control with a wide range of functions.

- 3.7-inch backlit LCD screen.
- Supports energy-saving functions with simple operation.
- Supports 9 languages: English, French, German, Greek, Italian, Portuguese, Russian, Spanish, and Turkish

Visually intuitive operation

- Each function is displayed as an icon.
- Main functions are indicated by large icons: "Mode," "Set Temp," and "Fan"
- Easy operation with control guide display
- Simple operation with easy 4-way navigation pad

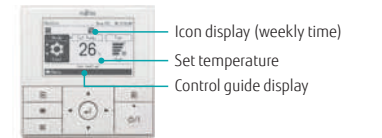

High performance and compact size


- A single remote controller controls each connected indoor unit and provides a variety of energy-saving options.



Energy-saving controls


Weekly Timer

- ON/OFF, mode and temperature can be set up to 8 times a day.
- 2 setting patterns are available (e.g., for Summer/Winter).

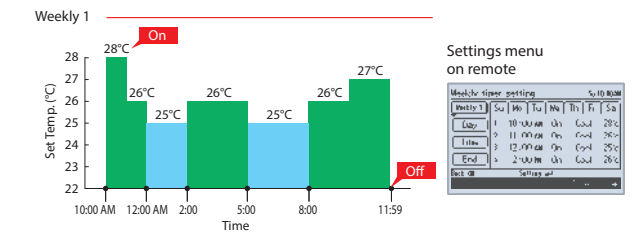

Auto-off timer

- Set temperature auto return
- Setting temperature range limitation

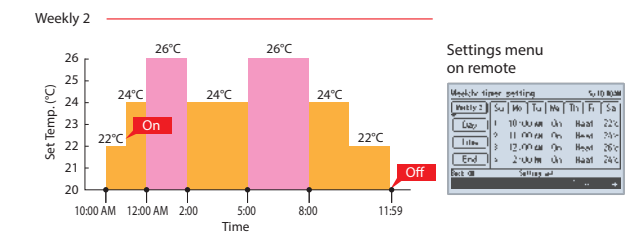


Specifications

Model name	UTY-RVNYM
Power source	12 V DC
Dimensions (H × W × D) (mm)	120 × 120 × 21.3
Weight (g)	220

12 V DC supplied by an indoor unit

Wired remote controller

UTY-RNNYM




- Simple operation with Built-in Weekly/Daily Timer.
- Control up to 16 indoor units.
- Up to 2 Wired remote controllers can be connected to a single indoor unit.

Accurate control for comfort

A thermo sensor built into the remote controller monitors room temperature accurately. The wired remote controller and an optional Remote sensor can be installed in any location to meet any requirement.

Examples of sensor changes

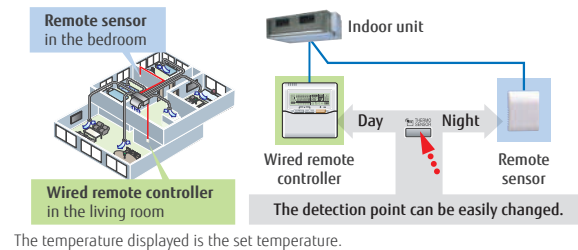

Up to 16 indoor units

Up to 1 group

Built-in timer

Weekly timer: ON/OFF time can be set to operate twice for each day of the week.
Temperature setback timer: Sets the time to change the temperature setting and the time to hold the setting for each day of the week.
 At "Weekly timer" + "Temperature setback timer" setup

Wireless remote controller

UTY-LNTY



Simple and versatile operations with a choice of 4 different types of timers

- Controls up to 16 indoor units.

Built-in timer

4 timer programs: ON/OFF/Program/Sleep
 Program timer: Sets ON/OFF time once for every 24 hours.
 Sleep timer: Adjusts the set temperature automatically while the sleep timer is on.

Easy installation and operation

Different codes can be assigned to up to 4 indoor units to prevent a mix-up.
 Wide and precise transmitting range

Up to 16 indoor units

Up to 1 group

Up to 4 different daily timers


Specifications

Model name	UTY-RNNYM	UTY-LNTY
Power source	12 V DC	5 V DC
Dimensions (H × W × D) (mm)	120 × 120 × 18	145 × 90 × 30
Weight (g)	160	150

12 V DC supplied by an indoor unit

IR receiver unit for duct type


UTY-LRHYM, UTY-LBTYM

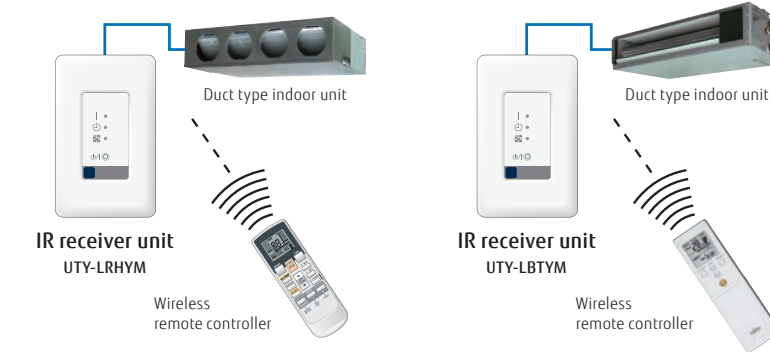

The wireless remote controller controls duct type indoor units.

IR receiver unit for Cassette

UTY-LRHYA2, UTY-LBTYC

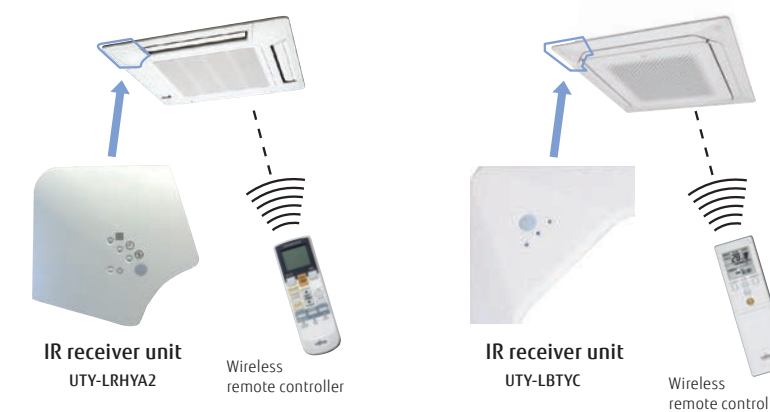

Cassette type indoor unit can be controlled with a Wireless remote controller.

IR receiver unit for ceiling type

UTY-LBTYH



The wireless remote controller controls ceiling type indoor units.

Specifications

Model name	UTY-LRHYM	UTY-LBTYM	UTY-LRHYA2	UTY-LBTYC	UTY-LBTYH
Battery	5 V DC	5 V DC	5 V DC	5 V DC	5 V DC
Dimensions (H × W × D) (mm)	145 × 90 × 30	145 × 90 × 30	193.9 × 193.9 × 31.2	193.9 × 193.9 × 31.2	174.8 × 48.6 × 23.1
Weight (g)	150	150	140	140	100

12 V DC supplied by an indoor unit

Central remote controller

UTY-DMMYM/UTY-DMMYM1




Up to 1 multi-split system

Up to 8 indoor units

For 5-unit, 6-unit, 8-unit multi-split type

- Batched control of up to 8 indoor units For all indoor units connected to the remote controllers, the Central remote controller sets room temperature, airflow volume, and remote controller prohibition from other remote controllers at once.
- Supports 9 languages: English, French, German, Greek, Italian, Portuguese, Russian, Spanish, and Turkish.
- Large backlit LED screen
- Large, easy-to-see operation panel


Example of system configuration

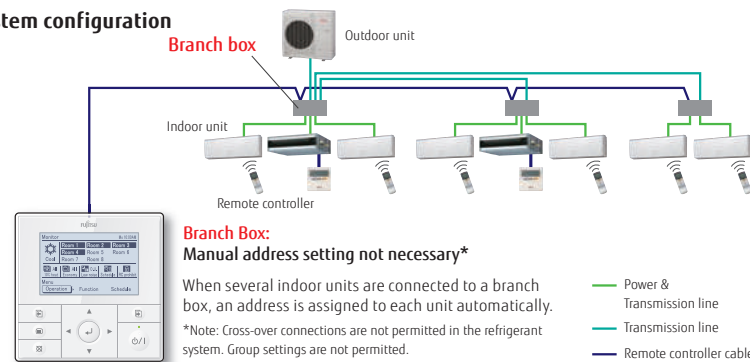

Central remote controller

Weekly timer

Up to 4 ON/OFF settings can be programmed per day. Two weekly patterns can be set, one for the cooling season and the other for the heating season.

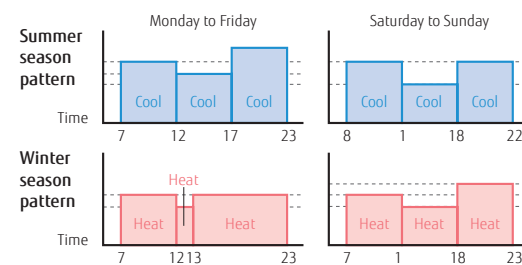

Low noise operation

You can choose from 4 low noise levels depending on the installation environment. ON/OFF timing of low noise mode can be set with the timer.

10°C heat operation

When you leave the house, the air conditioner runs a minimum heating operation to maintain the room temperature at 10°C.


*Consult your dealer for conditions of use.

Economy operation

When you select energy-saving economy mode, the temperature setting for the indoor unit increases (during cooling operation) or decreases (during heating operation) by 1°C and the maximum electric value of the outdoor unit is suppressed.

Prohibiting local control, including settings such as child lock

The Central Remote Controller is equipped with a lock function to prevent unauthorized operation from the remote controllers of the indoor unit in each room. The central remote controller is equipped with a child lock to prevent children from accidentally turning the air conditioner on or off or changing its settings.

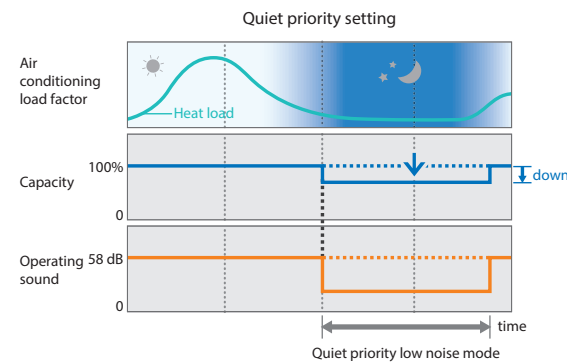

Specifications

Model name	UTY-DMMYM/UTY-DMMYM1
Power source	12 V DC
Dimensions (H × W × D) (mm)	120 × 120 × 21.3
Weight (g)	220

12 V DC supplied by an indoor unit

Network converter for single-split type

UTY-VTGX/UTY-VTGXV



UTY-VTGX
DC power supply type




UTY-VTGXV
AC power supply type

- A network converter is required when connecting a single-split system to a VRF network system.
- Compact and lightweight design
- Connectable to both nonpolar 2-core and polar 3-core remote controllers

Installation example

- A 1-remote-controller type and a 2-remote-controller type are available.
- Power supply (220 to 240 V AC, 50/60 Hz) is required for the 2-remote-controllers type.

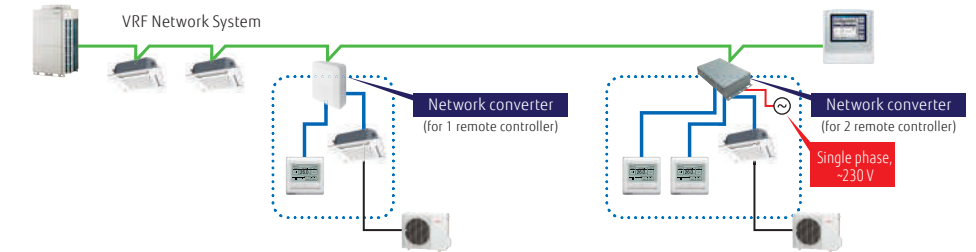


Up to 16 single indoor units


Up to 1 group

Up to 100 Network Converters

- Both nonpolar 2-core and polar 3-core type Wired remote controllers can be connected.

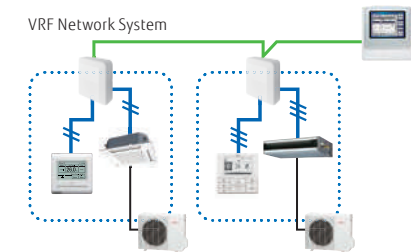

- Central control can be provided for single-split systems. (Up to 100 network converters can be connected in a VRF network system)

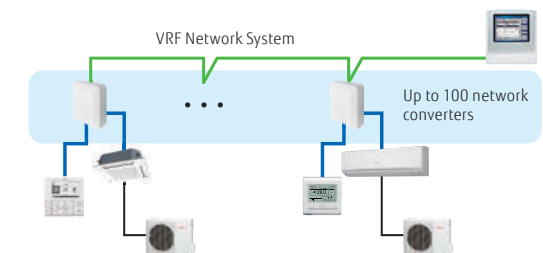

Specifications

Model name	UTY-VTGX	UTY-VTGXV
Power supply	polar 3-core 12 V DC	nonpolar 2-core DC 12 V
Input power (W)	Max. 1.2 W	
Dimensions (H × W × D) (mm)	140 × 117 × 43	54 × 260 × 150
Weight (g)	250	1,100

Wireless remote controller

UTY-LNHY



Simple and versatile operations with a choice of 4 different types of timers

- Controls up to 16 indoor units.

Built-in timer

4 timer programs: ON/OFF/Program/Sleep
 Program timer: Sets ON/OFF time once for every 24 hours.
 Sleep timer: Adjusts the set temperature automatically while the sleep timer is on.

Easy installation and operation

Different codes can be assigned to up to 4 indoor units to prevent a mix-up.
 Wide and precise transmitting range


Up to
16 indoor units

Up to
1 group

Up to
4 different daily timers

IR receiver unit for duct type

UTB-YWC, UTY-TRHX

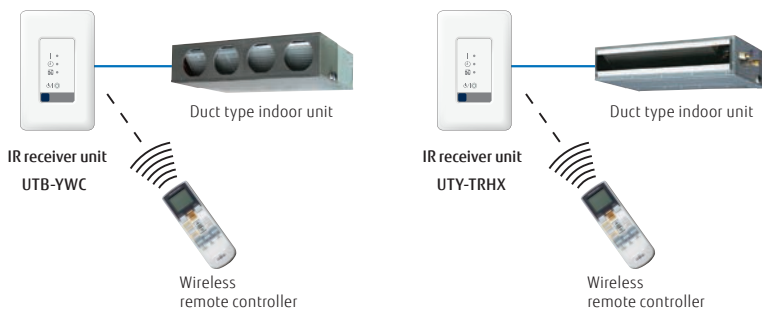


The wireless remote controller controls duct type* indoor units.

*Large airflow duct types do not work with this IR receiver unit.

*A separate wireless remote control (model: UY-LNHY) is required.

IR receiver unit for Cassette

UTY-LRHYB1, UTY-LBHxD, UTY-TRHX

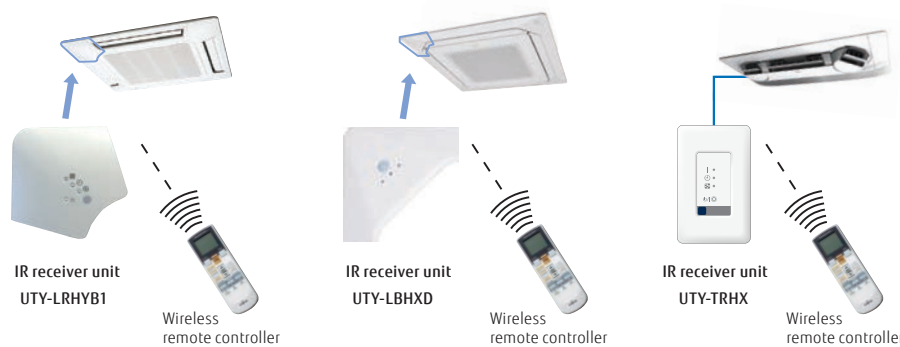

Cassette type indoor unit can be controlled with a Wireless remote controller.

*A separate wireless remote control (model: UY-LNHY) is required.

Specifications

Model name	UTY-LNHY	UTB-YWC	UTY-LRHYB1	UTY-LBHxD	UTY-TRHX
Battery	1.5 V (R03/LR03/AAA) × 2	5 V DC	5 V DC	5 V DC	5 V DC
Dimensions (H × W × D) (mm)	170 × 56 × 19	145 × 90 × 30	193.9 × 193.9 × 31.2	193.9 × 193.9 × 31.2	145 × 90 × 30
Weight (g)	85	150	140	140	150

12 V DC supplied by an indoor unit



Central Remote Controller

UTY-DCGYZZ



NEW



For tenants in small to midsize commercial premises

- Individual control and monitoring of up to 100 indoor units
- 7.0inch TFT color screen
- Visually intuitive operation
- Room temperature display by indoor unit sensor & remote controller sensor
- 50 Remote Controller Groups Display & remote controller group rename
- Supports 12 languages: Chinese, Dutch, English, French, German, Greek, Italian, Polish, Portuguese, Russian, Spanish, and Turkish


Up to 100 indoor units

Up to 50 groups


Easy Operation

Air conditioning management by detecting room temperatures of each room

The room temperature detected with indoor unit sensor or remote controller sensor can be displayed. New model can detect the room temperature by indoor units sensors even if wired remote controllers are not connected to the indoor units.

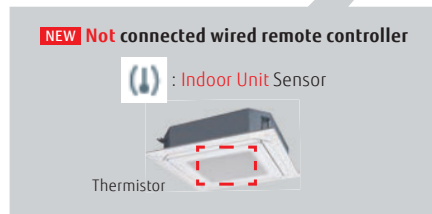

*Room temperature is displayed only when indoor unit operates.

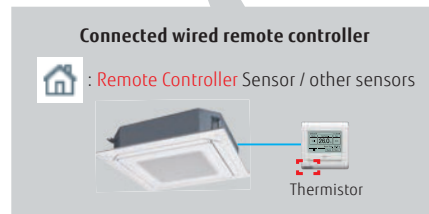

NEW 50 Remote Controller Groups Display


The group display and the 50 remote controller groups display can be switched easily. Users can choose which display is better, depending on the situation.

Group Display



Manage & Monitor by each Groups

50 Remote Controller Groups Display

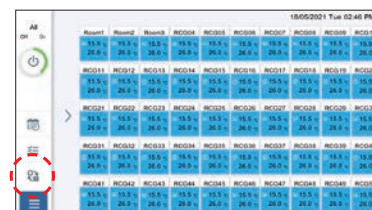


Manage & Monitor by 50 Remote Controller Groups




NEW Remote Controller Groups Rename

The remote controller group names can be changed. Users can know easily where the air conditioning is located by changing the remote controller group names.

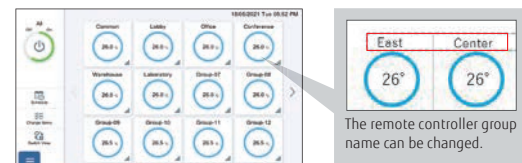


Features: Central Remote Controller

- Easy intuitive operation from the touch panel display.
- All functions can be accessed through the monitoring screen showing a pop-up window for detailed operation.



Monitoring screen

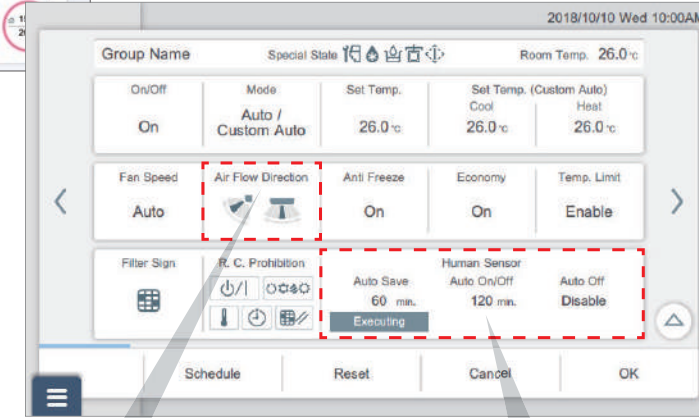

Individual setting

NEW Added individual wind direction control


Individual wind direction control has been added.
Circular Flow cassette / 3D Flow cassette



Circular flow cassette

NEW Human Sensor Compatible

Human sensor setting
• Auto save
• Auto on / off
• Auto off detection time
• Enable and disable




Remote Management

Remote monitoring / Remote operation

New central remote controller can control your tenant's air conditioner anytime and anywhere.

When the central remote controller manages the indoor units of some tenants, air conditioning of each tenants can be managed separately online.

NEW Increased the Number of Accounts

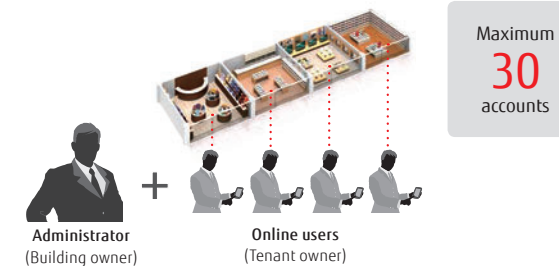

Trouble support function

Display error details

Display descriptive explanation when an error occurs



Sensor value monitoring function

Monitor sensor data of indoor unit / outdoor unit, send mail

Notify room temperature by email*

Notify by e-mail when the temperature around the air conditioner is too high or too low

*This function is available only when using wired remote controller.

Specifications

Model name	UTY-DCGYZZ
Power Supply	100-240 V 50/60 Hz
Dimensions (H × W × D) (mm)	134.6 × 216.2 × 37.9
Weight (g)	800

Touch panel controller

UTY-DTGYZ1



- Large 7.5-inch TFT color LCD screen
- Touch screen operation
- Stylish design to fit nicely into any room environment
- Controls up to 400 indoor units.
- Icon or list view can be selected in monitoring mode.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.
- Mounted with LAN adapter for remote control & operation, external input/output with emergency stop and batch ON/OFF

Easy operation

- Wide range of simple-to-understand icons
- Operate by pressing the icons on the screen with your finger or a stylus.
- The color on the back identifies the current control operation; blue is for monitoring and green is for operational control.

Up to 400 indoor units

Up to 100 outdoor units

Up to 400 groups



Easy maintenance

- The flat touch panel can be easily cleaned.
- Touch panel controller with non-glare coating to prevent finger marks
- Front cover for easy removal.




Easy installation

- The touch panel controller can be mounted on a wall.
- Flat back surface enables easy installation anywhere on a wall.
- No additional parts or components required for installation




Controls up to 400 indoor units.

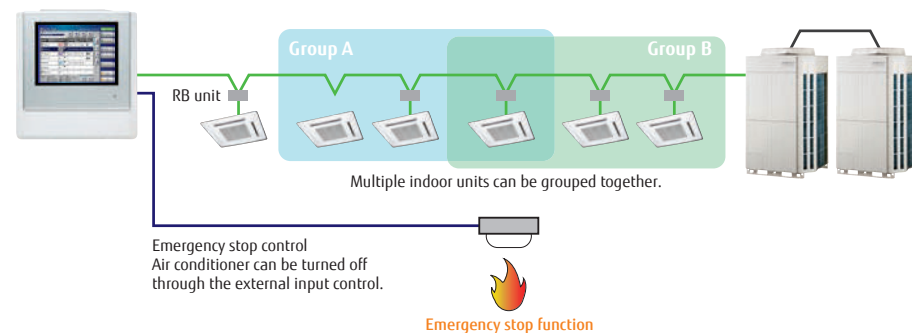

Features:

Control & monitoring

- Control and monitor Fujitsu General air conditioners via LAN or internet.
- Users and tenants can manage their assigned equipment from anywhere by computer or tablet.
- When something goes wrong, an error notice is sent by e-mail for prompt troubleshooting.

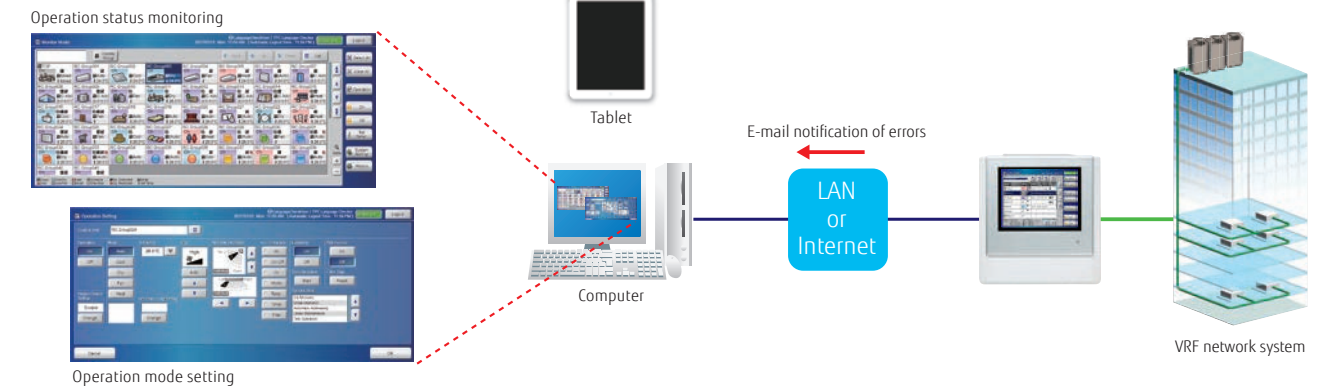

Smartphone


Model name	Browser
Nexus 6P (Android 7.1.1)	Google Chrome 5.5
iPhone 7 (iOS 10.1)	Safari 10

Tablet

Model name	Browser
iPad Pro 9.7 inch (iOS 10.2.1)	Safari 10


Flexible access permissions can be granted to users at each point level.

The administrator can register multiple users and permit them to access any indoor unit and any functions.

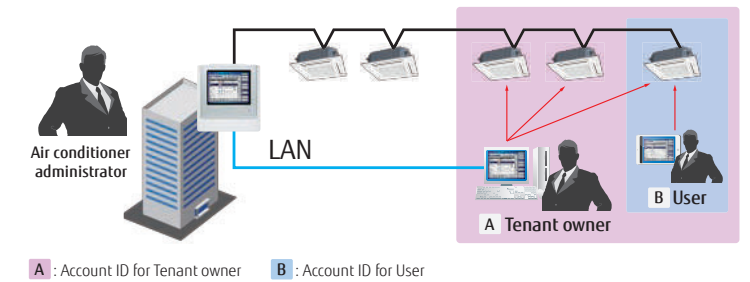

Additional languages


Supports 7 languages as standard: Chinese, English, French, German, Polish, Russian, and Spanish. Create a language database to integrate additional languages into the remote device. The added languages will only be displayed on the remote device and cannot be added to the Touch panel controller.

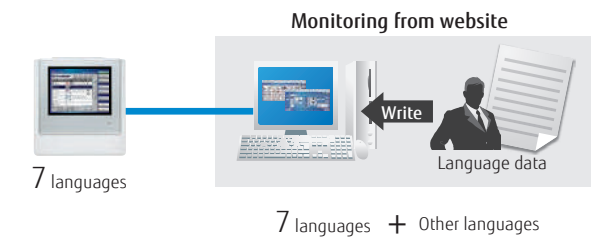

Electricity charge apportionment (Option: UTY-PTGXA)

- Energy cost can be calculated and allocated to each billing user in proportion to the amount of energy used for air conditioning.

- Apportionment charge/bill calculation
- Tenant (block) setting
- Common facilities apportionment setting
- Rated power consumption allotment setting
- Individual calculations for cooling and heating
- Electricity meter supported

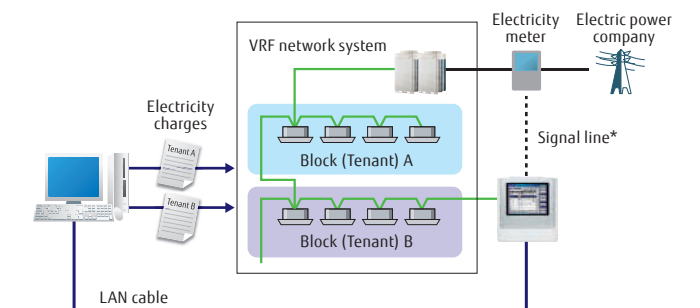

* An electricity usage meter can be connected to an external input connector of the Touch panel controller. In that case, the meter cannot be connected to an outdoor unit at the same time.

Features:


Automatic setting for daylight saving time

Functions provided

- 1) Schedule setting for daylight saving time
 - It prevents the user from forgetting to set daylight saving time. In addition, it saves time and effort for the user.


Automatic clock adjustment

- 2) Time can be set for all controllers in a batch automatically.

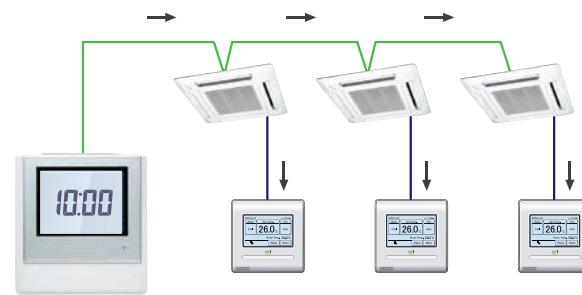


Outdoor unit low noise operation

You can choose from 4 low noise levels depending on the installation environment. ON/OFF timing of low noise mode can be set with the timer.

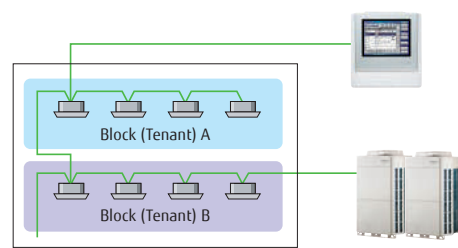

Quiet priority setting

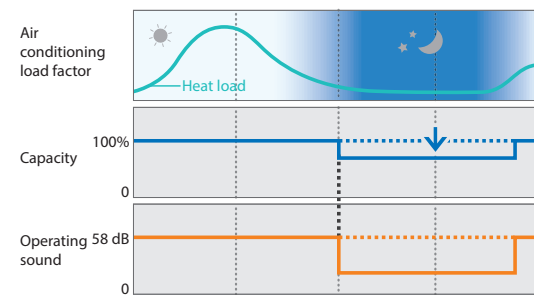

Energy-saving controls


Custom Auto

- Maintains 2 separate setpoints for heating and cooling operations.
- Automatically switches between heating and cooling modes.

* Not available for some models



Cooling set temp. 28°C, Heating set temp. 18°C

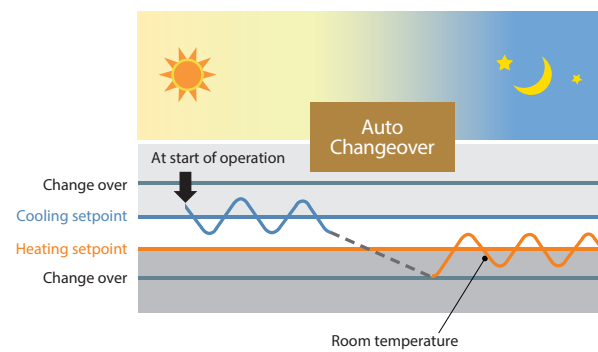

Refrigerant leak detector

Refrigerant leakage status is indicated by the management equipment. A pop-up message is displayed to notify the user, and the refrigerant is shut off.



Pop-up highlighting

FUNCTIONS SUMMARY

	UTY-DTGVZ1	Monitoring side
Air conditioning control functions		
ON/OFF	●	●
Operation mode setting*	●	●
Fan speed control	●	●
Room temperature setting	●	●
Setting temperature range limitation	●	●
Test operation	●	●
Vertical louver setting	●	●
Horizontal louver setting	●	●
Individual louver control	●*1	●
Group setting	●	●
Remote controller prohibition	●	●
Anti-freeze setting	●	●
Set temperature auto return	—	●
Energy-saving controls	—	●
Economy mode setting	●	●
Human sensor control	—	●
Displayed items		
Error	●	●
Defrosting	●	●
Current time	●	●
Day of week	●	●
Remote controller prohibition	●	●
Cooling/heating priority	●	●
Address display	●	●
Room temperature	●*3	●*3
Multiple language support	●	●
Setting for daylight saving time	●	●
Time zone setting	●	●
Name registration	●	●
Backlighting	●	●
Language setting	7	7+ other
Filter sign reset	●	●
Memory operations	●	●
Refrigerant leak detector	●	●

●: Supported ○: Optional function —: Not supported
 *1 Only setting cancellation can be operated.
 *2 Only available for external input control.
 *3 Available only when using a Wired remote controller.

Specifications

Model name	UTY-DTGVZ1
Power supply	Single phase ~100 to 240 V 50/60 Hz
Dimensions (H × W × D) (mm)	260 × 246 × 54
Weight (g)	2,150
Interfaces	Transmission/LAN/USB/EXT IN/EXT OUT/Reset SW

	UTY-DTGVZ1	Monitoring side	
Timer			
	Period	Year	Year
Schedule timer	ON/OFF, Temp, Mode, Times per day	20	20
ON/OFF timer		—	—
Sleep timer		—	—
Program timer		—	—
Auto-off timer		—	●
Day off		●	●
Minimum unit of timer setting (minutes)		10	10
Control			
Remote monitoring management system		●	●
Electricity charge apportionment		○	○
Error history		●	●
Emergency stop		●*2	●*2
Remote monitoring management		—	●
Energy-saving management		—	—
E-mail notification in case of failure		—	●
Key lock		● Password setting	—
Low noise mode		●	●

System controller

UTY-APGXZ1 **Software**

Up to **4** VRF network systems

Up to **400** outdoor units

Up to **1,600** indoor units

System controller enables advanced integrated monitoring and control of VRF network systems operating in small to large buildings.

- Up to 1,600 indoor units and 400 outdoor units on up to 4 VRF network systems can be controlled.
- To accommodate facility management needs, the system controller offers—in addition to precise air conditioning control—remote central control, electricity charge apportionment, schedule management, and energy-saving options for VRF network systems.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.



System controller Lite

UTY-ALGXZ1 **Software**

Up to **1** VRF network system

Up to **100** outdoor units

Up to **400** indoor units

System controller Lite offers a set of standard functions to manage air conditioners operating in a small or midsize building.


- Up to 400 indoor units and 100 outdoor units on a VRF network system can be controlled.
- In addition to precise air conditioning control, a variety of applications are available as options to offer a wider range of control.
- Supports 7 languages: Chinese, English, French, German, Polish, Russian, and Spanish.



Visually intuitive operation

Click & Operate: The visual representation of the property is shown on the screen from the perspective most suitable for operation (Click & Operate) You can select from among 4 display options: site, building, floor, and list.

Freely define groups for batched control: Indoor units can be grouped for simplified batch control from the tree menu. They can be grouped by organizational hierarchy, such as by division, department, and section.

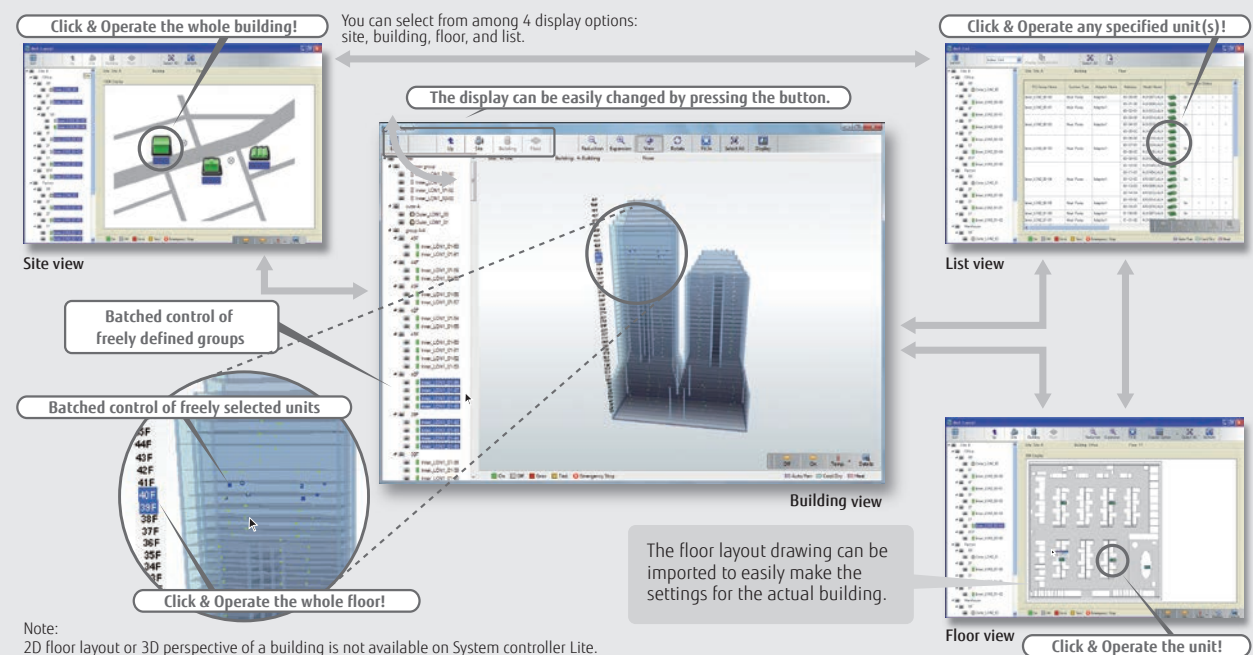


Note: 2D floor layout or 3D perspective of a building is not available on System controller Lite.

Features:

Third-party devices connected via MODBUS® can be controlled.

Standard for System Controller **Option** for System controller Lite UTY-PLGXX2

When a MODBUS® adapter (locally available) is connected to a computer, electrical equipment and devices supported by MODBUS® can be monitored and controlled centrally from the computer. The central control can reduce wasted energy throughout an entire building resulting from a failure to turn equipment off during or after work, as well as reduce the need for on-site patrols.

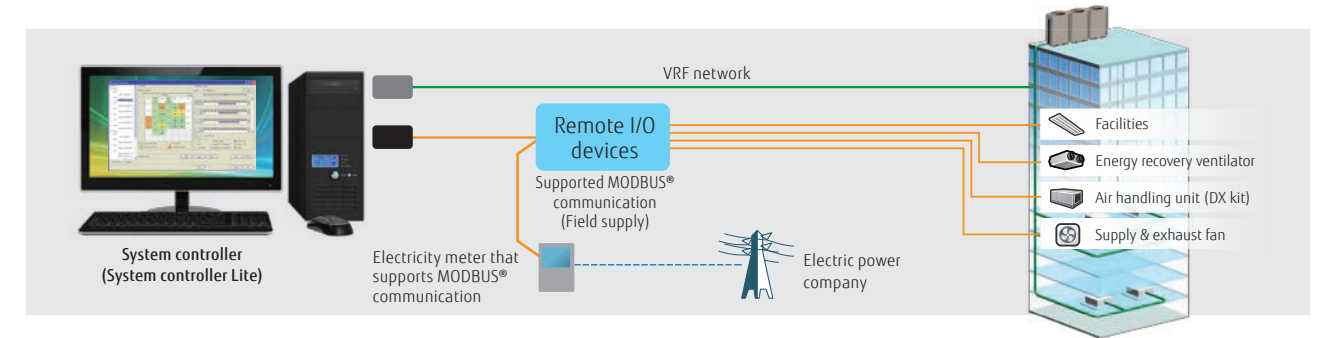


Wide-ranging operation and data management

Standard System controller and System controller Lite

Schedule management

- An annual schedule can be arranged for each remote controller group or user-defined group.
- ON/OFF, operation mode, remote controller prohibition, and temperature settings can be programmed for up to 143 times per day at 10-minute intervals and for up to 101 configurations for each remote controller group.
- Settings can be programmed for a period that spans midnight.
- Allows for the programming of special settings for weekends, holidays, and store closings throughout the year.
- Low noise operation of outdoor units can be scheduled.

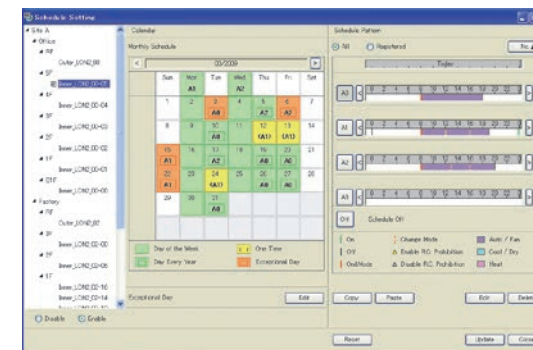

Wide-ranging control of indoor and outdoor units

- The operation status and mode of each indoor unit are displayed.
- Turn on and off each indoor unit and switch its operation mode.
- Setting temperature range limitation
- Low noise setting of outdoor units

Remote controller prohibition

Prohibits the operation mode, temperature setting, or ON/OFF of an indoor unit.

Error alert and e-mail notice

When something goes wrong, an error message is shown in a popup on a computer display with a chime, and an e-mail notice is sent. Errors of the past one year are logged and can be reviewed.

Operation and control history

A history of operation status and control can be maintained and retrieved.

Importing and exporting databases

Only an administrator is authorized to import and export registration, layout, and image data.

Automatic clock adjustment


Time can be set for all controllers in batch automatically.

Electricity charge apportionment

Standard on System controller
Option System controller Lite UTY-PLGXA2

Electricity charge apportionment method

This is a method to calculate monthly energy costs to be allocated to each tenant based on the amount of energy used by their air conditioners. The first step is to determine exactly how much energy is consumed by air conditioners in each tenant space. The second step is to divide the total energy charge billed by an electric power company based on the amount of energy used by each tenant to determine the energy cost to be allocated to each of them. (See figure on right) The calculation takes into consideration such factors as the number of unused rooms and nighttime electricity rate, which are shown in detail on an energy cost allocation schedule.

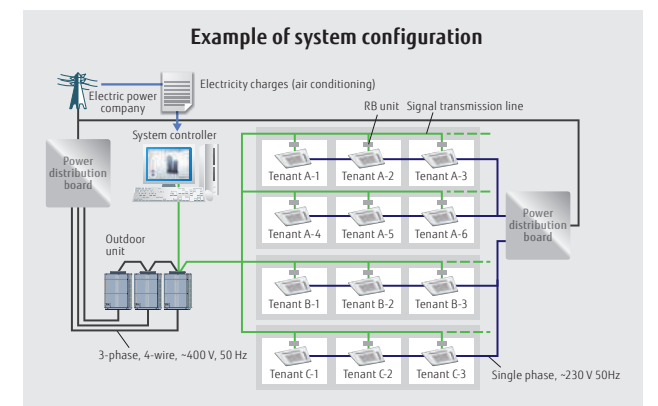


Features:

Remote monitoring management


- Standard** on System controller
- Option** System controller Lite UTY-PLGXR2

The System controller can be used on site or remotely over networks for remote central control. The System controller requires 2 software programs working together: The VRF controller runs on site and communicates with the VRF system; The VRF explorer, which runs at a remote location, provides a user interface and communicates with the VRF controller. The VRF controller and the VRF explorer run on a single computer or on different computers connected on a network. A computer running VRF explorer can centrally control up to 10 VRF system sites having up to 20 buildings each.

On site central control

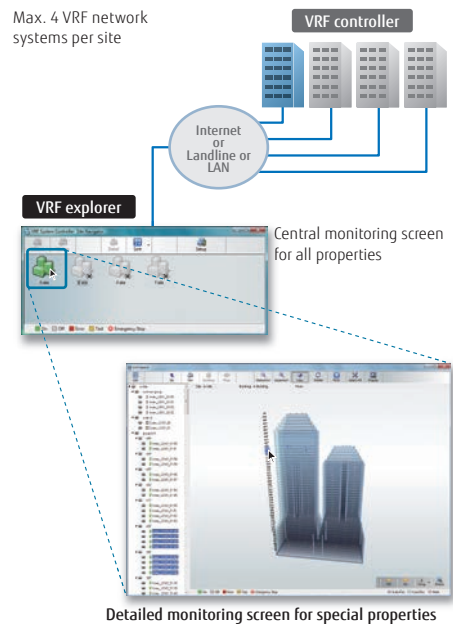

Remote central control

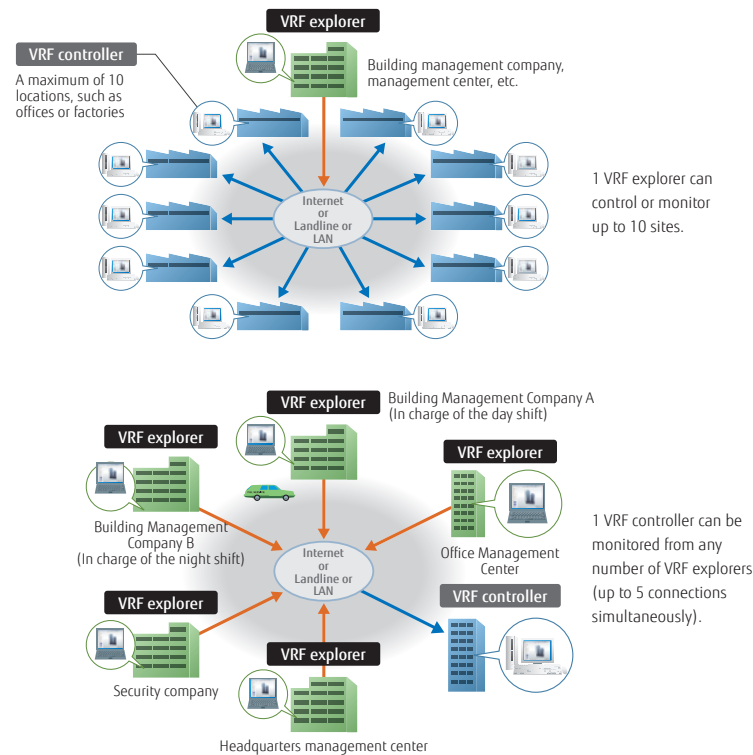

Energy-saving management

- Option** System controller UTY-PEGXZ1
- Option** System controller Lite UTY-PLGXE2

A variety of energy-saving options can be selected depending on the season, weather, and time of day. Excellent energy-saving operation is performed while keeping users comfortable.



Main screen for energy-saving management

Energy saving graph data: This chart compares the energy consumption for the current month with the previous month and with the same month of the previous year to keep track of the energy-saving performance.

Indoor unit rotation

Indoor units can be automatically rotated to operate within a group in accordance with a predetermined annual schedule to reduce power consumption while keeping users comfortable. The operation stoppage rate can be selected for an indoor unit.

Peak-cut mode

The system controller monitors the connected power meter and controls the energy to maintain the target power consumption set for each time period by changing the set temperature of the indoor units or turning off the thermostat so as to keep the users comfortable. Indoor units to be controlled can be grouped in many ways, and the control level can be set for each group.

Capacity saving for outdoor unit

The upper limit on the capacity of an outdoor unit can be adjusted to reduce power consumption during a hot summer or cold winter by averaging out the power-saving performance of each refrigerant system. The upper limit on capacity can be set at 50% of the rated capacity or more.

Summary of functions

Functions	Type	System controller		System controller Lite				
		UTY-APGXZ1	Option UTY-PEGXZ1	UTY-ALGXZ1	Option UTY-PLGXR2	Option UTY-PLGXA2	Option UTY-PLGXE2	Option UTY-PLGXX2
Specifications	Max. number of VRF networks supported	4	—	1	—	—	—	—
	Max. number of indoor unit and remote controller groups per VRF network	400	—	400	—	—	—	—
	Max. number of outdoor units per VRF network	100	—	100	—	—	—	—
	Max. number of indoor units and remote controller groups per System controller	1600	—	400	—	—	—	—
Site supervision	Multiple site display	10	—	10	—	—	—	—
	Number of buildings per site	20	—	—	—	—	—	—
	Number of floors per site	200	—	—	—	—	—	—
	Number of floors per building	50	—	—	—	—	—	—
	3D graphical layout view	●	—	—	—	—	—	—
	2D graphical layout view	●	—	—	—	—	—	—
	List display	●	—	●	—	—	—	—
Error management	Error notification	●	—	●	—	—	—	—
	Audible alarm	●	—	●	—	—	—	—
	E-mail notification of errors	●	—	●	—	—	—	—
History	Error history	●	—	●	—	—	—	—
	Operation history	●	—	●	—	—	—	—
Operation control	Individual control	ON/OFF	●	—	●	—	—	—
		Operation mode*	●	—	●	—	—	—
		Room temperature	●	—	●	—	—	—
		Fan speed	●	—	●	—	—	—
		Airflow direction	●	—	●	—	—	—
		Economy mode	●	—	●	—	—	—
	Individual management	Setting temperature range limitation	●	—	●	—	—	—
		Anti-freeze	●	—	●	—	—	—
		Low noise setting of outdoor units	●	—	●	—	—	—
	Other	Remote controller prohibition	●	—	●	—	—	—
		Setting temperature range limitation	●	—	●	—	—	—
		Filter sign reset	●	—	●	—	—	—
		memory operations	●	—	●	—	—	—
Schedule	Annual Schedule	Pattern operations	●	—	●	—	—	
		Annual Schedule	●	—	●	—	—	
	Setting for a specific date	●	—	●	—	—		
	ON/OFF per day	72	—	72	—	—		
	ON/OFF per week	504	—	504	—	—		
	Day off	●	—	●	—	—		
	Minimum unit of timer setting (minutes)	10	—	10	—	—		
Weekly schedule for low noise mode	●	—	●	—	—			
Remote monitoring management	Web Operation	●	—	●	—	—		
	Remote monitoring	●	—	●	—	—		
	Remote operation control	●	—	●	—	—		
	Remote function setting	●	—	●	—	—		
Electricity charge apportionment	Apportionment charge/bill calculation	●	—	●	—	—		
	Tenant (block) setting	●	—	●	—	—		
	Common facilities apportionment setting	●	—	●	—	—		
	Rated power consumption allotment setting	●	—	●	—	—		
Energy-saving management	Individual calculations for cooling and heating	—	●	—	●	—		
	Electricity meter supported	—	●	—	●	—		
	Indoor unit rotation	—	●	—	●	—		
	Peak cut control	—	●	—	●	—		
	Capacity saving for outdoor unit	—	●	—	●	—		
	Record of energy-saving operation	—	●	—	●	—		
Control of external devices	Information on energy saving	—	●	—	●	—		
	Power consumption monitor	—	●	—	●	—		
	Electricity meter supported	—	●	—	●	—		
Others	Monitor	●	—	●	—	—		
	Control	●	—	●	—	—		
	Importing and exporting databases	●	—	●	—	—		
	Automatic clock adjustment	●	—	●	—	—		
	Multiple language support	7 languages	—	7 languages	—	—		
Refrigerant leak detector	●	—	●	—	—			
Power shutdown	●	—	●	—	—			

●: Available - : Not available

Computer requirements

The specifications required for the computer are shown in the table below:

	System controller	System controller Lite
Operating system	<ul style="list-style-type: none"> Microsoft® Windows® 7 Home Premium (32-bit or 64-bit) SP1, Windows® 7 Professional (32-bit or 64-bit) SP1 Microsoft® Windows® 8.1 (32-bit or 64-bit), Windows® 8.1 Pro (32-bit or 64-bit) Microsoft® Windows® 10 Home (32-bit or 64-bit), Windows® 10 Pro (32-bit or 64-bit) Supports 7 languages: English, Chinese, French, German, Russian, Spanish, and Polish	<ul style="list-style-type: none"> Microsoft® Windows® 7 Home Premium (32-bit or 64-bit) SP1, Windows® 7 Professional (32-bit or 64-bit) SP1 Microsoft® Windows® 8.1 (32-bit or 64-bit), Windows® 8.1 Pro (32-bit or 64-bit) Microsoft® Windows® 10 Home (32-bit or 64-bit), Windows® 10 Pro (32-bit or 64-bit) Supports 7 languages: English, Chinese, French, German, Russian, Spanish, and Polish
CPU	Intel® Core™ i3 2 GHz or higher	Intel® Core™ i3 2 GHz or higher
Memory	<ul style="list-style-type: none"> 2 GB or more (for Windows® 7 [32-bit]) 4 GB or more (for Windows® 7 [64-bit], Windows® 8.1, and Windows® 10) 	<ul style="list-style-type: none"> 2 GB or more (for Windows® 7 [32-bit]) 4 GB or more (for Windows® 7 [64-bit], Windows® 8.1, and Windows® 10)
HDD	40 GB or more of free space	40 GB or more of free space
Displayed items	1024 × 768 or higher resolution	1024 × 768 or higher resolution
Interfaces	<ul style="list-style-type: none"> Ethernet port (for getting access to the internet using LAN) or a modem (for getting access to the internet via landline) Up to 6 USB ports (Only required for a server computer working as a VRF controller) - Maximum of 2 USB ports are required to connect to a White-USB-key/WibuKey - Up to 4 USB ports required to connect to an Echelon® U10 USB network interface * Maximum number of required USB ports depends on the applicable system configuration. 	<ul style="list-style-type: none"> Ethernet port (for getting access to the internet using LAN) or a modem (for getting access to the internet via landline) Up to 6 USB ports (Only required for a server computer working as a VRF controller) - Maximum of 4 USB ports are required to connect to a White-USB-key/WibuKey - 1 USB port is required for an Echelon® U10 USB Network interface * The maximum number of required USB ports depends on the applicable system configuration.
Graphic accelerator	Microsoft® DirectX® 9.0c compatible	Microsoft® DirectX® 9.0c compatible
Software	Adobe® Acrobat Reader® 9.0 or later	Adobe® Acrobat Reader® 9.0 or later

* Echelon® U10 USB Network interface - TP/FT-10 Channel (Model name: 75010R) (Required for each VRF Network)

Packing list

Type	For System controller			For System controller Lite			
	System controller	Option Energy manager	System controller Lite	Remote access	Option Electricity charge apportionment	Option Energy saving	Option Centralized control
Model name	UTY-APGXZ1	UTY-PEGXZ1	UTY-ALGXZ1	UTY-PLGXR2	UTY-PLGXA2	UTY-PLGXE2	UTY-PLGXX2
White-USB-key	1	1	1	1	1	1	1

*1: Software protection key to be inserted in a USB slot running System controller or System controller Lite. System controller or System controller Lite may only run on a PC with a WHITE-USB-KEY. However, a WHITE-USB-KEY is not required for remote VRF explorer software.

BACnet® gateway

UTY-ABGXZ1 (Software)



White-USB-key (Software Protection Key)




BACnet® is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (BI). BTL is a registered trademark of BACnet International.

Up to **4** VRF network systems
Up to **400** outdoor units
Up to **1,600** indoor units

- A medium to large BMS can be connected to a VRF network system via BACnet®, a standard communication protocol for open networks.
- Up to 1,600 indoor units on up to 4 VRF network systems (up to 400 indoor units and 100 outdoor units per system) can be connected to a single BACnet® gateway.
- The VRF network system can be controlled or monitored from BMS via BACnet® gateway.
- Compatible with BACnet® (ANSI/ASHRAE-135-2014) application specific controller (B-ASC).
- Compatible with BACnet®/IP over Ethernet.
- Scheduling, alarm and event setting, and energy cost allocation are provided on the BACnet® gateway.
- The VRF network system can be connected to a computer via a U10 USB interface. Note that Fujitsu General does not supply a U10 USB interface or a computer. They must be purchased separately by the user.
- Corresponds to 7 different languages: English, Chinese, French, German, Spanish, Russian, Polish.

Installation example

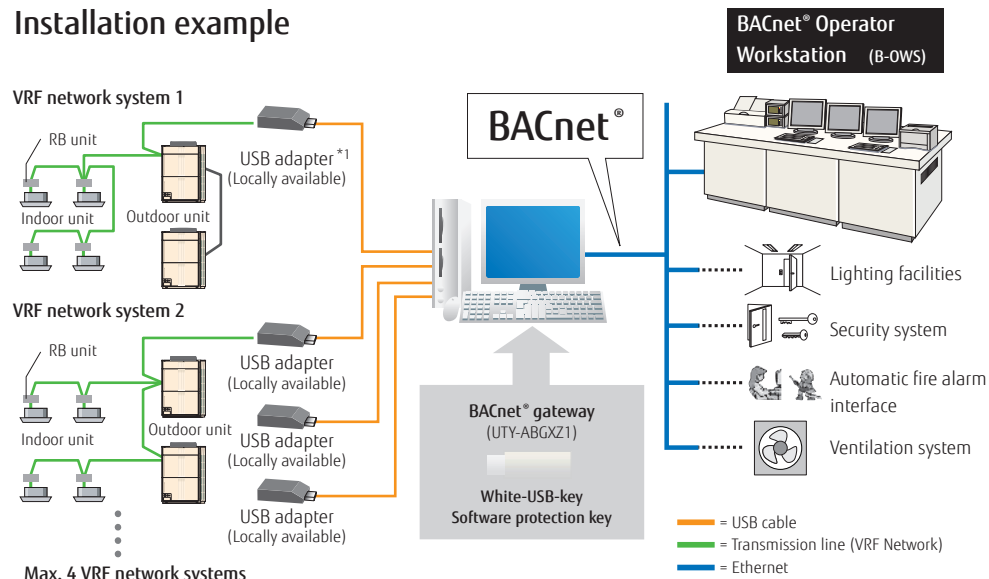

*1: U10 USB network interface available from Echelon® Corporation.

Computer requirements

	UTY-ABGXZ1
Operating system	<ul style="list-style-type: none"> • Microsoft® Windows® 7 Home Premium (32-bit or 64-bit) SP1, Windows® 7 Professional (32-bit or 64-bit) SP1 • Microsoft® Windows® 8.1 (32-bit or 64-bit), Windows® 8.1 Pro (32-bit or 64-bit) • Microsoft® Windows® 10 Home (32-bit or 64-bit), Windows® 10 Pro (32-bit or 64-bit) Supported languages: Chinese, English, French, German, Polish, Russian, and Spanish
CPU	Intel® Core™ i3 2 GHz or higher
Memory	<ul style="list-style-type: none"> • 2 GB or more (for Windows® 7 [32-bit]) • 4 GB or more (for Windows® 7 [64-bit], Windows® 8.1, and Windows® 10)
HDD	40 GB or more of free space
Displayed items	1024 × 768 or higher resolution
Interfaces	<ul style="list-style-type: none"> • Ethernet port (for getting access to the internet using LAN) • Up to 5 USB ports - 1 USB port required to connect to a White-USB-key/WibuKey - Up to 4 USB ports required to connect to an Echelon® U10 USB network interface *The maximum number of required USB ports varies depending on the applicable system configuration.
Software	Adobe® Acrobat Reader® 9.0 or later

*Echelon® U10 USB Network interface – TP/FT-10 Channel (Model name: 75010R) (Required for each VRF Network)

Packing list

Name and shape	Quantity	Application
White-USB-key	1	Includes the software, user's manual, and license for BACnet® gateway.

BACnet® gateway

UTY-VBGX (Hardware)




BACnet® is a registered trademark of ASHRAE. ASHRAE does not endorse, approve or test products for compliance with ASHRAE standards. Compliance of listed products to the requirements of ASHRAE Standard 135 is the responsibility of BACnet International (BI). BTL is a registered trademark of BACnet International.

Up to **1** VRF network system
Up to **32** refrigerant systems
Up to **128** indoor units

- BACnet® gateway connects BMS and a Fujitsu General VRF system.
- Up to 128 indoor units and 32 refrigerant systems can be connected to a single BACnet® gateway.
- Compatible with BACnet® (ANSI/ASHRAE-135-2012) application-specific controller (B-ASC)
- Compatible with BACnet®/IP over Ethernet.

Installation example

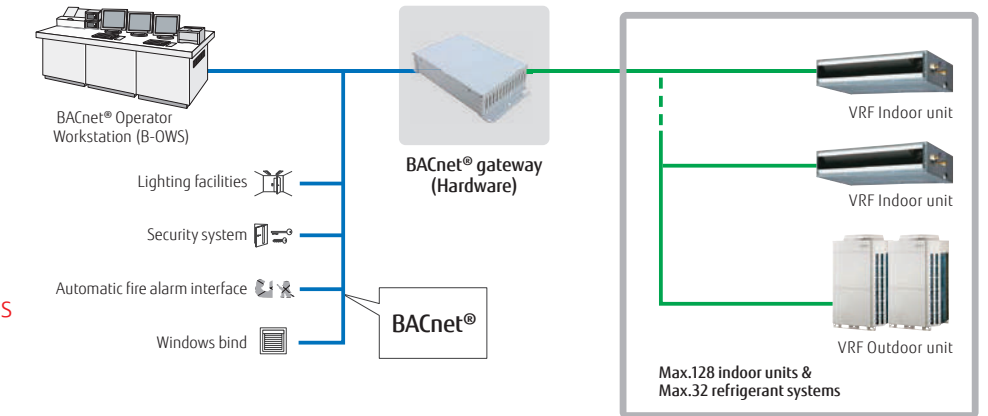

Max.128 indoor units & Max.32 refrigerant systems

Specifications

Model name	UTY-VBGX
Number of controllable indoor units	128
Number of controllable refrigerant systems	32
Number of controllable VRF networks	1
Number of connectable units / one VRF network	4

Model name	UTY-VBGX
Power supply	Single phase, 100-240 V, 50/60 Hz
Power consumption (W)	4.6 (max.)
Dimensions (H × W × D) (mm)	59.6 × 270.4 × 176
Weight (g)	1200

Multiple protocol LAN adapter

FG-TL-MBS16Z1



NEW




FG-TL-MBS16Z1 (VRF type)

No separate external power supply required

- Can be used for 16 indoor units.

Installation example

[VRF type]

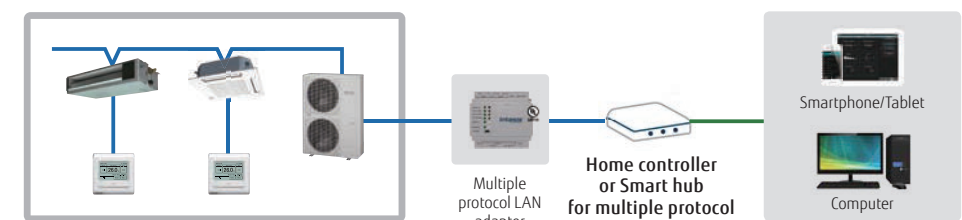

Up to **16** indoor units

Specifications

Model name	FG-TL-MBS16Z1 (VRF type)
Power supply	9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA.*
Input power (W)	1.7
Dimensions (H × W × D) (mm)	90 × 88 × 56
Weight (g)	330

*24 V DC power supply is recommended.

BACnet®/MODBUS® Router

FG-RTR-BAC32Z1/FG-RTR-MBS32Z1



NEW



FG-RTR-BAC32Z1 (BAC net)

NEW




FG-RTR-MBS32Z1 (MODBUS®)

Routing between BaCnet® MS/TP and BaCnet® IP networks


- Routing between BaCnet® MS/TP and BaCnet® IP networks
- Routing between MODBUS® RTU and MODBUS® TCP networks

Installation example

[BaCnet® type]

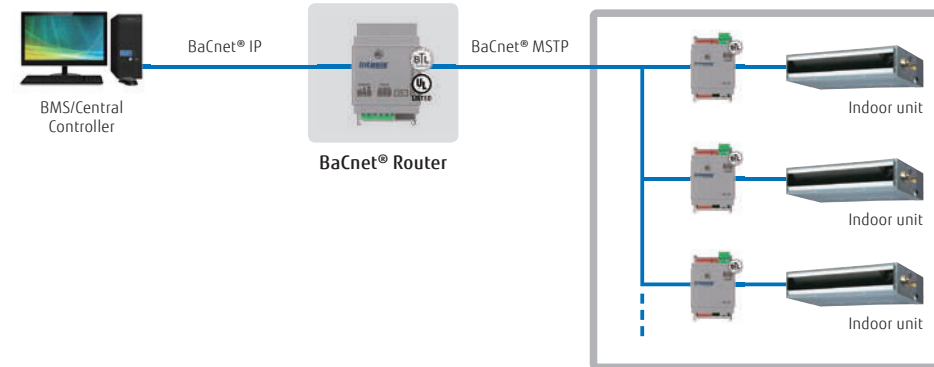

[MODBUS® type]

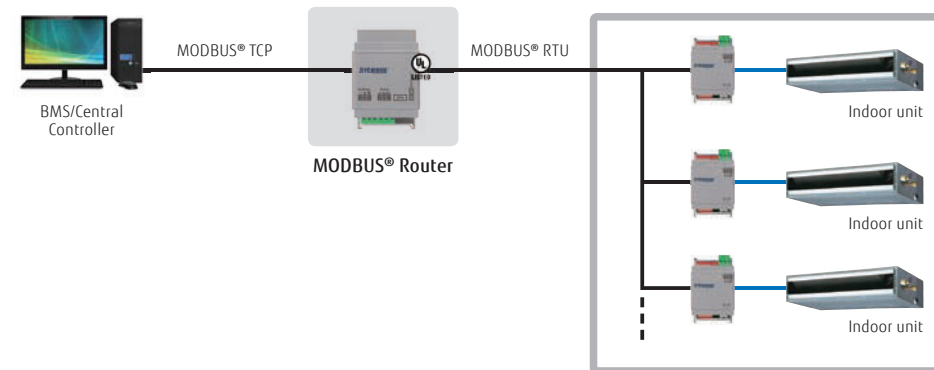

Specifications

Model name	FG-RTR-BAC32Z1 (MS/TP to IP)	FG-RTR-MBS32Z1 (RTU to TCP)
Number of routable devices (max.)	32	32
Power supply	9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA	9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA
Power consumption (W)	1.7	1.7
Dimensions (H × W × D) (mm)	93 × 53 × 58	93 × 53 × 58
Weight (g)	150	150

BACnet®/MODBUS® Cloud Device

FG-CLD-BMG4Z1/FG-CLD-BMG8Z1/FG-CLD-BMG16Z1/FG-CLD-BMG32Z1




NEW



FG-CLD-BMG4Z1/8/16/32Z1

- The most powerful configuration tool common to all BACnet® gateways provides the system integrators with the power to configure and monitor their systems in an easy and reliable manner.
- A simple, easy-to-use description for the ST Cloud Web and App User Interface, with all widgets customizable to the user's needs, enabling system integrators to easily offer the best user experience to customers who are in control of their BaCnet® or MODBUS® devices.

Installation example

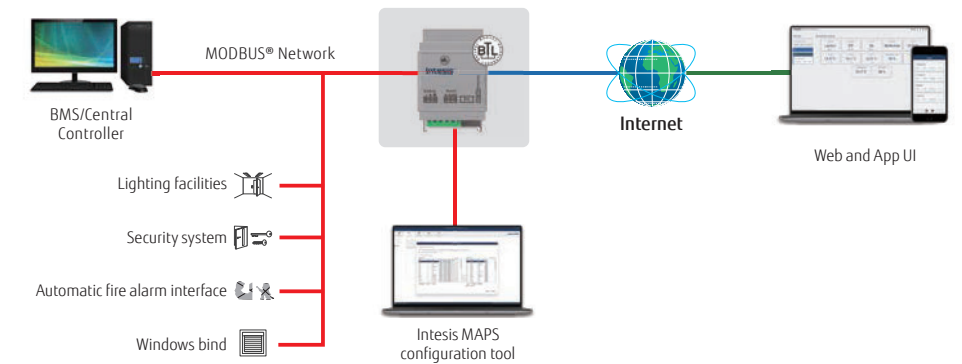

*BMS: Building Management System

Gateway features

- BaCnet® IP/MSTP or MODBUS® TCP/RTU connectivity
- Up to 32 devices can be connected to each gateway.
- Up to 12 widgets per device
- Easy device configuration with Intesis MAPS

Next-generation services

- Industrial-grade connectivity now for building automation
- Fast and scalable real-time edge connectivity over HMS HubTM
- Full data control and protection
- Secure and remote updates during the application lifetime

System Features

- Monitor and control all devices in an intuitive way
- Comes with a native iOS and Android app and a web interface
- Create scenes and interact with multiple concurrent devices
- Calendar that shows the daily planned installation commands
- Notifications keep you updated about system status
- Device sharing and usage permissions management
- Multiple site management from a common dashboard

Specifications

Model name	FG-CLD-BMG4Z1	FG-CLD-BMG8Z1	FG-CLD-BMG16Z1	FG-CLD-BMG32Z1
Number of connectable BaCnet® (IP/MSTP) or MODBUS® (TCP/RTU) devices	4	8	16	32
Power supply	9 to 24 V DC, 50/60Hz	9 to 24 V DC, 50/60Hz	9 to 24 V DC, 50/60Hz	9 to 24 V DC, 50/60Hz
Power consumption (W)	1.7	1.7	1.7	1.7
Dimensions (H × W × D) (mm)	93 × 53 × 58	93 × 53 × 58	93 × 53 × 58	93 × 53 × 58
Weight (g)	150	150	150	150

MODBUS® convertor for VRF

UTY-VMGX/FG-TL-MBS16Z1



UTY-VMGX

MODBUS® convertor enables air conditioners to be fully integrated into a MODBUS® network.

- Compact and lightweight design
- Direct connection to MODBUS® network
- MODBUS® convertor enables central monitoring and control of air conditioners from BMS or a central controller.
- Up to 9 converters can be connected to a VRF network (UTY-VMGX). Simultaneous control, such as Power ON/ OFF and temperature setting, can be performed for each zone.
- If a connection error occurs after installation work is completed, the source of the error can be located easily.

Up to 9 units per VRF system

Up to 100 outdoor units

Up to 128 indoor units

NEW





FG-TL-MBS16Z1

Up to 16 indoor units

Up to 16 outdoor units

Installation example

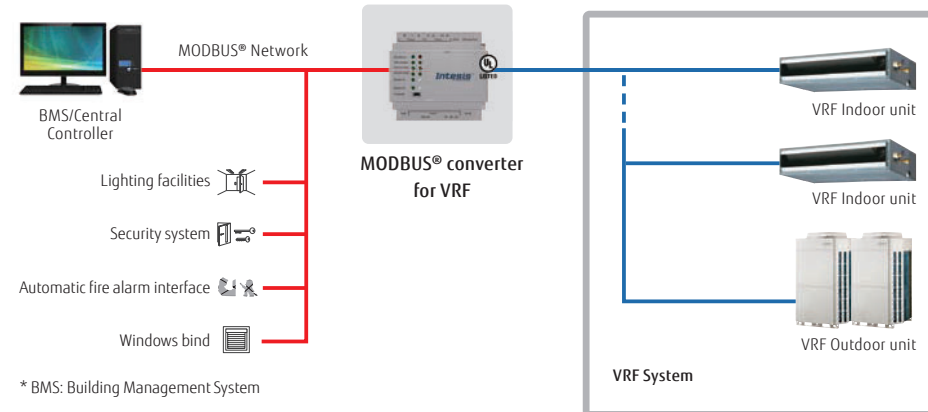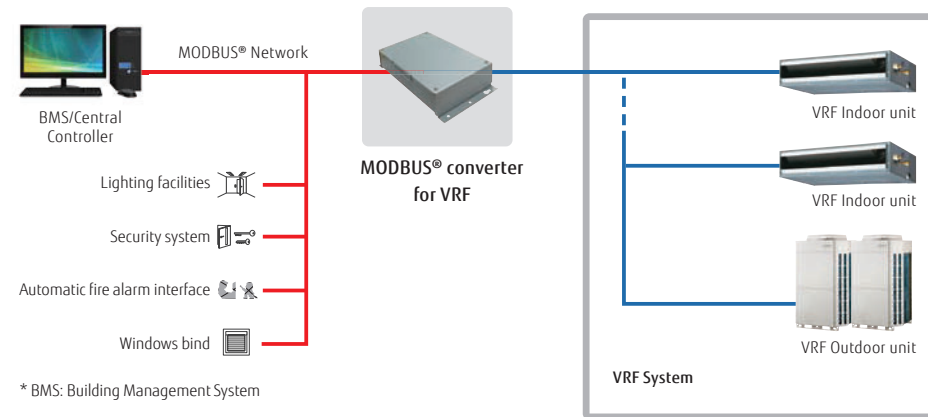


Specifications

Model name	UTY-VMGX	FG-TL-MBS16Z1
Power supply	Single phase ~220 to 240 V 50/60 Hz	9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA.*
Input power (W)	Max. 2	1.7
Dimensions (H × W × D) (mm)	54 × 260 × 150	90 × 88 × 56
Weight (g)	1,100	330

*24 V DC power supply is recommended.

KNX® converter for VRF

UTY-VKGX/FG-TL-KNX16Z1



UTY-VKGX

KNX® converter enables centralized control of a system.

- KNX® converter connects a central or home controller and a Fujitsu General VRF system.
- Up to 128 indoor units and 100 outdoor units can be connected to a single KNX® converter. (UTY-VKGX)

Up to 100 outdoor units

Up to 128 indoor units

NEW




FG-TL-KNX16Z1

Up to 16 indoor units

Up to 16 outdoor units

Installation example

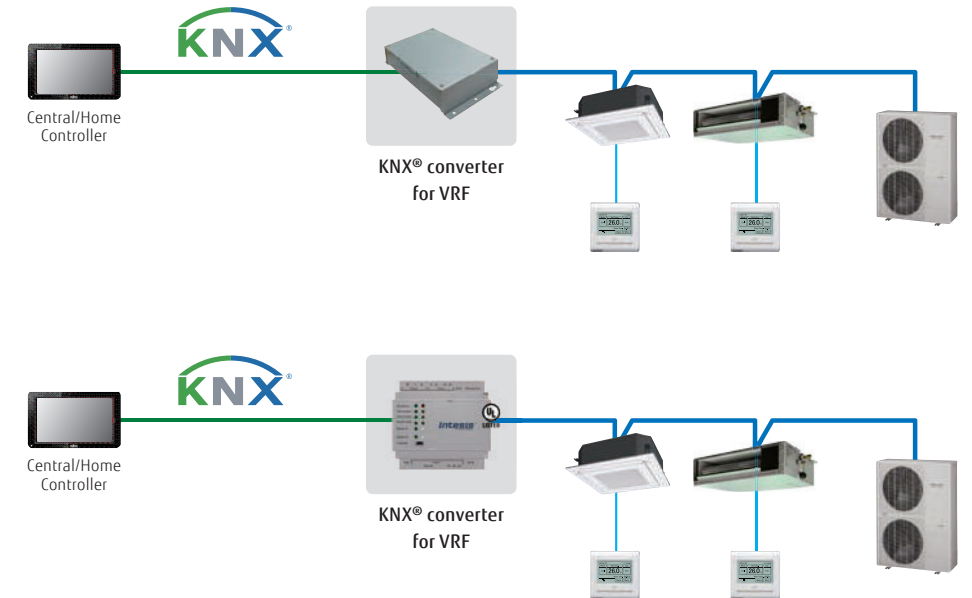


Specifications

Model name	UTY-VKGX	FG-TL-KNX16Z1
Power supply	Single phase ~220 to 240 V 50/60 Hz	9 to 36 V DC, Max.: 140 mA or 24 V AC 50/60 Hz, Max.: 127 mA.*
Input power (W)	1.5	1.6
Dimensions (H × W × D) (mm)	54 × 260 × 150	90 × 88 × 56
Weight (g)	1,200	340

*24 V DC power supply is recommended.


Signal amplifier

UTY-VSGXZ1



- The transmission line can be extended up to 3,600 m using multiple Signal amplifiers.
- Up to 8 Signal amplifiers can be added in a VRF network system.
- A Signal amplifier is required.
 - (1) When the total wiring length of the transmission line exceeds 500 m.
 - (2) When the total number of units on the transmission line exceeds 64.

Installation example

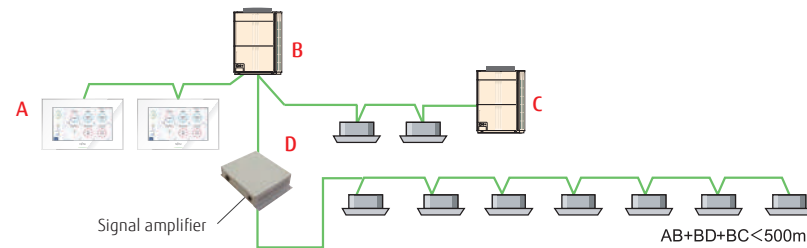

Specifications

Model name	UTY-VSGXZ1
Power supply	Single phase ~208 to 240 V 50/60 Hz
Power consumption (W)	4.5
Dimensions (H × W × D) (mm)	67 × 288 × 211
Weight (g)	1,500


Network converter for LONWORKS®

UTY-VLGX



- Connects the VRF network system to a **LONWORKS®** open network to manage small and midsized BMS and VRF network system.
- The UTY-VLGX enables centralized monitoring and control of VRF network system from a BMS via a **LONWORKS®** interface.
- Up to 128 Indoor units can be connected to one network converter for **LONWORKS®**

Installation example

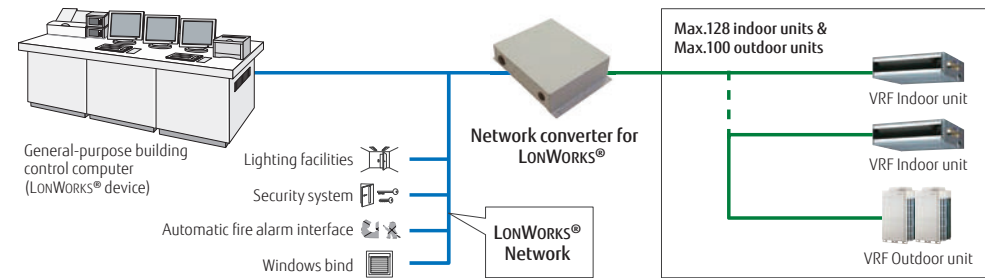

- Up to 4 units to BMS
- Up to 100 outdoor units
- Up to 128 indoor units

Specifications

Model name	UTY-VLGX
Power supply	Single phase ~208 to 240 V 50/60 Hz
Power consumption (W)	4.5
Dimensions (H × W × D) (mm)	67 × 288 × 211
Weight (g)	1,500

Transmission specifications (BMS side)

Transmission speed	78 kbps
Transceiver	FT-X1 (available from Echelon® Corporation)
Transmission line form	Free topology
Terminal resistor	None (converter to be attached at the terminal of a network)



Controller system list (available) for Split/Multi-split

Controller Options/Accessories:



Type	Refrigerant	Indoor unit														Indoor unit				Outdoor unit			
		Wall-mounted				Cassette		Duct		Duct				Floor	Ceiling	Multi-split			Single phase				
		Flagship Series	Designer Series		Standard Series	ECO Series	Compact 4-way flow Series	Circular flow Series	Slim	Medium static pressure (Compact)	Medium static pressure (Standard)	High static pressure		BIG			Wall-mounted	Compact cassette	Mini duct	Slim duct	5/6/8-unit multi-split		
ASYG 12KXCA	ASYG 07/09/12/14 KGTB	ASYG 07/09/12/14 KETA, KETA-B	ASYG 07/09/12/14 KMCC	ASYG 18/24KMTB	ASYG 30/36KMTA	ASYG 07/09/12 KPCA	AUXG 09/12/14/18/22/24 KVLA	AUXG 18/22/24/30/36/45/54 KRLB	ARXG 09/12/14/18 KLLAP	ARXG 12/14/18/22/24/30/36/45/54 KHTAP	ARXG22KMLB, ARXG 24/30/36/45 KMLA	ARXG 45/54KHTA	ARYG 45/54/60 LHTA	ARYG 72/90LHTA	ACYG 09/12/14 KVCA	ABYG 18/22/24/30/36/45/54 KR1A	ASYG 22KMTB	AUXG 07KVLA	ARXG 07/09/12/14/18 KSLAP	ARXG 07KLLAP	AOYG36KBTAS		
R410A																						AOYG45LBA6 AOYG45LBT8	
Wired remote controller			● UTY-RNRYZ5+ UTY-TWRXZ2			● UTY-RNRYZ5+ UTY-TWRXZ2			● UTY-RNRYZ5					● UTY-RNRYZ5	● UTY-RNRYZ5+ UTY-TWRXZ3	● UTY-RNRYZ5	● UTY-RNRYZ5+ UTY-TWRXZ2		● UTY-RNRYZ5				
			● UTY-RLRY+ UTY-TWRXZ2			● UTY-RLRY+ UTY-TWRXZ2			● UTY-RLRY					● UTY-RLRY	● UTY-RLRY+ UTY-TWRXZ3	● UTY-RLRY	● UTY-RLRY+ UTY-TWRXZ2		● UTY-RLRY				
			● UTY-RCRYZ1+ UTY-TWRXZ2			● UTY-RCRYZ1+ UTY-TWRXZ2			● UTY-RCRYZ1					● UTY-RCRYZ1	● UTY-RCRYZ1+ UTY-TWRXZ3	● UTY-RCRYZ1	● UTY-RCRYZ1+ UTY-TWRXZ2		● UTY-RCRYZ1				
					● UTY-RVNYM+ UTY-TWBXFZ				● UTY-RVNYM					● UTY-RVNYM					● UTY-RVNYM				
					● UTY-RNNYM+ UTY-TWBXFZ				● UTY-RNNYM					● UTY-RNNYM					● UTY-RNNYM				
Simple remote controller			● UTY-RSRY UTY-RHRY+ UTY-TWRXZ2			● UTY-RSRY UTY-RHRY+ UTY-TWRXZ2			● UTY-RSRY, UTY-RHRY, UTY-RSNYM					● UTY-RSRY, UTY-RHRY, UTY-RSNYM	● UTY-RSNYM	● UTY-RSRY UTY-RHRY UTY-RSNYM	● UTY-RSRY UTY-RHRY+ UTY-TWRXZ3	● UTY-RSRY UTY-RHRY	● UTY-RSRY UTY-RHRY+ UTY-TWRXZ2	● UTY-RSRY UTY-RHRY UTY-RSNYM			
Central remote controller																						● UTY-DMMYM1*3 (KBTAS) ● UTY-DMMYM*3 (LBA6, LBT8)	
Wireless remote controller									● UTY-LNTY													● UTY-LNTY	
IR receiver unit with Wireless remote controller														● UTY-LRHYM (60)	● UTY-LRHYM								
									● UTY-LBTYC	● UTY-LBTYM				● UTY-LBTYM		● UTY-LBTYM	● UTY-LBTYH				● UTY-LBTYM	● UTY-LBTYM	

*1: Available only when the WLAN adapter (UY-TFSXF2) is removed. *2 Available only when the WLAN adapter (UY-TFSXZ1) is removed. *3 Consult your dealer for conditions of use.

Controller system list (available) for Split/Multi-split

Controller Options/Accessories:



Type	Refrigerant	Indoor unit														Indoor unit				Outdoor unit							
		Wall-mounted				Cassette		Duct		Duct				Floor	Ceiling	Multi-split			Single phase								
		Flagship Series	Designer Series		Standard Series		ECO Series		Compact 4-way flow Series	Circular flow Series	Slim	Medium static pressure (Compact)	Medium static pressure (Standard)	High static pressure		BIG			Wall-mounted	Compact cassette	Mini duct	Slim duct	5-unit multi-split				
ASYG 12KXCA	ASYG 07/09/12/14 KGTB	ASYG 07/09/12/14 KETA, KETA-B	ASYG 07/09/12/14 KMCC	ASYG 18/24KMTB	ASYG 30/36KMTA	ASYG 07/09/12 KPCA	ASYG 18/24KLCA	AUXG 09/12/14/18/22/24 KVLA	AUXG 18/22/24/30/36/45/54 KRLLB	ARXG 09/12/14/18 KLLAP	ARXG 12/14/18/22/24/30/36/45/54 KHTAP	ARXG22KMLB, ARXG 24/30/36/45 KMLA	ARXG 45/54KHTA		ARYG 45/54/60 LHTA	ARYG 72/90LHTA			ACYG 09/12/14 KVCA	ABYG 18/22/24/30/36/45/54 KR1A	ASYG 22KMTB	AUXG 07KVLVA	ARXG 07/09/12/14/18 KSLAP	ARXG 07KLLAP	AOYG36KBTAS		
Interfaces	MODBUS® Converter		•	•	•	•			•		•				•		•	•	•	•	•		•				
	MODBUS® interface		•	•	•	•			•		•		•		•		•	•	•	•	•		•				
	KNX® converter		•	•	•	•			•		•				•		•	•	•	•	•		•				
	KNX® interface		•	•	•	•			•		•		•		•		•	•	•	•	•		•				
WLAN adapter	3-wire RC-line type CN connector type	•	•	•					•		•			•		•	•	•	•	•		•					
	IR type							•	•	•				•		•	•	•	•	•		•					
	3-wire RC-line type CN connector type		•						•					•		•	•	•	•	•		•					
	IR type								•	•	•			•		•	•	•	•	•		•					
	3-wire RC-line type CN connector type		•						•					•		•	•	•	•	•		•					
	IR type								•	•	•			•		•	•	•	•	•		•					
External switch controller		•	•	•					•					•		•	•	•	•	•		•					
Network converter for single-split type	DC power supply type AC power supply type	•	•	•					•					•		•	•	•	•	•		•					

*There are no optional parts for the KL Series.
*1: Available only when the WLAN adapter (UY-TFSXF2) is removed. *2: Available only when the WLAN adapter (UY-TFSXZ1) is removed.

Controller System List (available) for VRF

Controller Options:



Type	Refrigerant	Indoor unit																Indoor unit																
		Cassette						Duct						Duct				Floor		Ceiling/Floor		Ceiling		Wall-mounted										
		One-way flow	3D flow	Compact Grid type/ Standard type	Slim type		Large type		Slim type		Large type		Mini (With drain pump)		Slim (With drain pump)		Slim High-efficiency		Normal		Medium static pressure		High static pressure		-	External EEV	Ceiling/Floor	Ceiling	-	External EEV	-	External EEV	-	-
					4-way flow	Circular flow	Mini	Slim	High-efficiency	Normal	High-efficiency	Normal	High-efficiency	High-efficiency	Normal	High-efficiency																		
AUXV 004/007/009/ 012/014/018/ 024GLEH	AUXS 018/024 GLEH	AUXB 004/007/009/ 012/014/018/ 024GLEH	AUXD 18/24GALH	AUXA 18/24/30/ 34/36/45/54 GALH	AUXN 009/012/014 GLAH, AUXM 018/024/030 GLEH	AUXK 018/024/030/ 034/036/045/ 054GLEH	ARXK 004/007/009/ 012/014/018/ 024GLGH	ARXD 04GALH	ARXD 007/009/012/ 014/018/024 GLEH	ARXP 009/012/ 014/018 GLAH	ARXA 024/030/ 036/045 GLEH	ARXQ 018/024 GTAH	ARXP 024/030 GTAH	ARXC 036/072/ 090/096 GTEH	ARXC 45/60GATH	ARXQ 030GTAH	AGYA 004/007/ 009/012/014 GCGH	AGYE 004/007/ 009/012/014 GCEH	ABYA 012/014/ 018/024 GTEH	ABYA 030/036/ 045/054 GTEH	ASVA 004/007/009 GCGH	ASVE 004/007/009 GCEH	ASVA 012/014GCGH	ASVE 012/014GCEH	ASVA 18/24GBCH	ASVA 030/034GTEH								
Controllers		●																●																
		●																●																
		●																●																
Simple remote controller		● UTY-RSRY UTY-RHRY	● UTY-RSRY, UTY-RHRY, UTY-RSKY, UTY-RHKY		● UTY-RSRY UTY-RHRY		● UTY-RSRY, UTY-RHRY, UTY-RSKY, UTY-RHKY		● UTY-RSRY UTY-RHRY		● UTY-RSRY, UTY-RHRY, UTY-RSKY, UTY-RHKY		● UTY-RSRY UTY-RHRY		● UTY-RSRY, UTY-RHRY, UTY-RSKY, UTY-RHKY		● UTY-RSRY UTY-RHRY		● UTY-RSRY UTY-RHRY, UTY-RSKY, UTY-RHKY		● UTY-RSRY UTY-RHRY		● UTY-RSRY UTY-RHRY		● UTY-RSRY UTY-RHRY, UTY-RSKY, UTY-RHKY		● UTY-RSRY UTY-RHRY		● UTY-RSRY UTY-RHRY					
Wireless remote controller		●																●																
IR receiver unit		● UTY-TRHX	● UTY-LRHYB1		● UTY-LBHDXD		● UTY-TRHX	● UTB-YWC	● UTY-TRHX	● UTB-YWC	● UTY-TRHX	● UTB-YWC	● UTB-YWC		● UTY-TRHX	● UTB-YWC																		
Central remote controller		●																●																
Touch panel controller		●																●																
System controller, System controller Lite		●																●																

Controller System List (available) for VRF

Controller Options:



Type	Refrigerant	Indoor unit														Indoor unit													
		Cassette						Duct				Duct				Floor		Ceiling/Floor		Ceiling		Wall-mounted							
		One-way flow	3D flow	Compact Grid type/Standard type	Slim type		Large type		Low static pressure duct				Medium static pressure				-	external EEV	-	external EEV	-	external EEV	-	external EEV	-	external EEV			
		AUXV 004/007/009/ 012/014/018/ 024GLEH	AUXS 018/024 GLEH	AUXB 004/007/009/ 012/014/018/ 024GLEH	AUXD 18/24GALH	AUXA 18/24/30/ 34/36/45/54 GALH	AUXN 009/012/014 GLAH, AUXM 018/024/030 GLEH	AUXK 018/024/030/ 034/036/045/ 054GLEH	ARXK 004/007/009/ 012/014/018/ 024GLGH	ARXD 04GALH	ARXD 007/009/012/ 014/018/024 GLEH	ARXP 009/012/ 014/018 GLAH	ARXA 024/030/ 036/045 GLEH	ARXQ 018/024 GTAH	ARXP 024/030 GTAH	ARXC 036/072/ 090/096 GTEH	ARXC 45/60GATH	ARXQ 030GTAH	AGYA 004/007/ 009/012/014 GCGH	AGYE 004/007/ 009/012/014 GCEH	ABYA 012/014/ 018/024 GTEH	ABYA 030/036/ 045/054 GTEH	ASVA 004/007/009 GCGH	ASVE 004/007/009 GCEH	ASVA 012/014GCGH	ASVE 012/014GCEH	ASVA 18/24GBCH	ASVA 030/034GTEH	
Interfaces	BACnet® gateway	● UTY-ABGXZ1, UTY-VBGX														● UTY-ABGXZ1, UTY-VBGX													
	CN connector type	● FG-AC-BAC1Z1			● FG-AC-BAC1Z1			● FG-AC-BAC1Z1			● FG-AC-BAC1Z1			● FG-AC-BAC1Z1						● FG-AC-BAC1Z1									● FG-AC-BAC1Z1
Network converter for LONWORKS®		● UTY-VLGX														● UTY-VLGX													
		● UTY-VMSX			● UTY-VMSX			● UTY-VMSX			● UTY-VMSX			● UTY-VMSX						● UTY-VMSX									● UTY-VMSX
MODBUS® Converter		● UTY-VMGX FG-TL-MBS16Z1														● UTY-VMGX FG-TL-MBS16Z1													
		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1	● FG-AC-MBS1Z1
MODBUS® interface	3-wire RC-line type	● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1	● FG-AC-MBS1Z1
	CN connector type	● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1		● FG-AC-MBS1Z1		● FG-RC-MBS1Z1	● FG-AC-MBS1Z1
KNX® converter		● UTY-VKXS			● UTY-VKXS			● UTY-VKXS			● UTY-VKXS			● UTY-VKXS						● UTY-VKXS									● UTY-VKXS
		● UTY-VKGX FG-TL-KNX16Z1														● UTY-VKGX FG-TL-KNX16Z1													
KNX® interface	3-wire RC-line type	● FG-AC-KNX1Z1		● FG-RC-KNX1Z1		● FG-AC-KNX1Z1		● FG-RC-KNX1Z1		● FG-AC-KNX1Z1		● FG-RC-KNX1Z1		● FG-AC-KNX1Z1		● FG-RC-KNX1Z1		● FG-AC-KNX1Z1		● FG-RC-KNX1Z1		● FG-AC-KNX1Z1		● FG-RC-KNX1Z1		● FG-AC-KNX1Z1		● FG-RC-KNX1Z1	● FG-AC-KNX1Z1
	CN connector type	● FG-AC-KNX1Z1		● FG-RC-KNX1Z1		● FG-AC-KNX1Z1		● FG-RC-KNX1Z1		● FG-AC-KNX1Z1		● FG-RC-KNX1Z1		● FG-AC-KNX1Z1		● FG-RC-KNX1Z1		● FG-AC-KNX1Z1		● FG-RC-KNX1Z1		● FG-AC-KNX1Z1		● FG-RC-KNX1Z1		● FG-AC-KNX1Z1		● FG-RC-KNX1Z1	● FG-AC-KNX1Z1
WLAN adapter	IR type	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1	● FG-IR-KNX1Z1+UTY-LRHYB1	● FG-IR-KNX1Z1+UTY-LBHXD	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC
	CN connector type	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1	● FG-IR-KNX1Z1+UTY-LRHYB1	● FG-IR-KNX1Z1+UTY-LBHXD	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC	● FG-IR-KNX1Z1+UTY-TRHX	● FG-IR-KNX1Z1+UTB-YWC
External switch controller		● UTY-TFSXZ1														● UTY-TFSXZ1													
		● FG-AC-WIF1Z1		● FG-RC-WIF1Z2		● FG-AC-WIF1Z1		● FG-RC-WIF1Z2		● FG-AC-WIF1Z1		● FG-RC-WIF1Z2		● FG-AC-WIF1Z1		● FG-RC-WIF1Z2		● FG-AC-WIF1Z1		● FG-RC-WIF1Z2		● FG-AC-WIF1Z1		● FG-RC-WIF1Z2		● FG-AC-WIF1Z1		● FG-RC-WIF1Z2	● FG-AC-WIF1Z1
External switch controller		● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1	● FG-IR-WIF1Z1+UTY-LRHYB1	● FG-IR-WIF1Z1+UTY-LBHXD	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC
		● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1	● FG-IR-WIF1Z1+UTY-LRHYB1	● FG-IR-WIF1Z1+UTY-LBHXD	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC	● FG-IR-WIF1Z1+UTY-TRHX	● FG-IR-WIF1Z1+UTB-YWC
External switch controller		● FG-RC-WMP1Z1														● FG-RC-WMP1Z1													
		● FG-AC-WMP1Z1		● FG-RC-WMP1Z1		● FG-AC-WMP1Z1		● FG-RC-WMP1Z1		● FG-AC-WMP1Z1		● FG-RC-WMP1Z1		● FG-AC-WMP1Z1		● FG-RC-WMP1Z1		● FG-AC-WMP1Z1		● FG-RC-WMP1Z1		● FG-AC-WMP1Z1		● FG-RC-WMP1Z1		● FG-AC-WMP1Z1		● FG-RC-WMP1Z1	● FG-AC-WMP1Z1
External switch controller		● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1	● FG-IR-WMP1Z1+UTY-LRHYB1	● FG-IR-WMP1Z1+UTY-LBHXD	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC
		● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1	● FG-IR-WMP1Z1+UTY-LRHYB1	● FG-IR-WMP1Z1+UTY-LBHXD	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC	● FG-IR-WMP1Z1+UTY-TRHX	● FG-IR-WMP1Z1+UTB-YWC
External switch controller		● UTY-TERX														● UTY-TERX													
		● UTY-TERX														● UTY-TERX													

Optional parts overview

For Split & Multi-split, VRF

A variety of optional parts are available to enable installation of the selected indoor unit properly according to the environment.

Optional Parts For Cassette



Human sensor kit
A built-in thermo sensor monitors and controls room temperature accurately.




Cassette grille
A lineup of cassette grilles that match a variety of interiors. A grid ceiling-type cassette grille has been added to the lineup.




Silver ion filter
The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.*




Fresh air intake kit
Fresh air can be taken in by a fan connected to an external control unit.




Insulation kit for high humidity
for Compact cassette type/Cassette type
Insulation kit for high humidity is used when the installation location is in a high humidity environment.



Air outlet shutter plate
Airflow directions can be changed to 3 directions using the Air outlet shutter plate depending on the installation location.



Wide Panel
When a cassette type is installed in a narrow space in the ceiling, the wide panel fills in that space.




Panel spacer
If the ceiling space is tight and the main body protrudes from the ceiling surface, a panel spacer can be used as a decorative trim.


Optional Parts For V-III



Pressure sensor kit
The height difference of the pressure sensor kit can be extended up to 110 m.

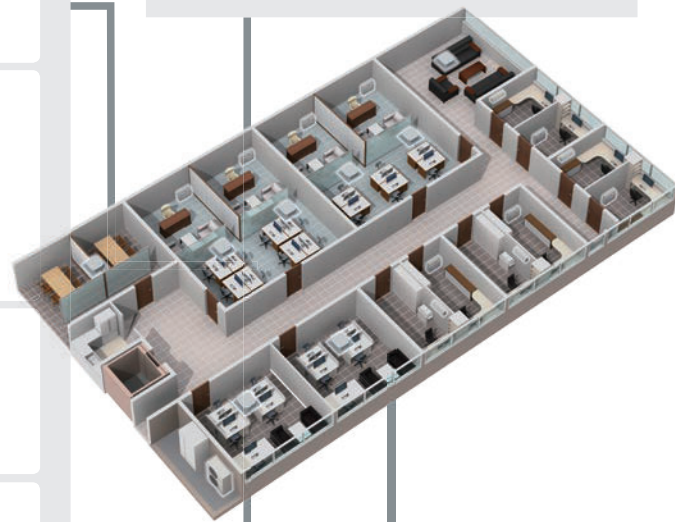

Optional Parts For Floor



Half concealed kit
Used to half conceal a floor type indoor unit in the wall.



Silver ion filter
The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.*




Optional Parts For Duct & Ceiling



Auto louver grille kit
The optional clean-looking flat Auto louver grille blends into any interior and provides a comfortable airflow.



Remote sensor unit
The remote sensor provides additional convenience.



Silver ion filter
The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.*



Long-life filter
Captures grit and dust. Long-life design with consideration of running costs.



Flange
Flanges are used when connecting a medium static pressure duct type and a ceiling type with air intake and exhaust ducts.



Drain pump unit
Drains water that has accumulated during operation.

Connection Parts




Communication kit
Required for a wall-mounted type when the External connect kit set or a Wired remote controller is connected to the indoor unit.



External input and output PCB
For Wall-mounted, Duct, or Cassette type, these parts are required when the external input and output function is used.



External input and output PCB box & bracket
Box and bracket for installing the External input and output PCB.



External connect kit & set
Connect the printed circuit board (PCB) to external devices.



Connection Units
Connection units are available to separate the pipes when connecting multiple indoor units in a Multi-split type or VRF system.



External power supply unit
The External power supply unit protects the increment in the system even if the power supply for some of the indoor units is shut down.

*Not a result of experiments in an actual use environment. Silver ion filter inhibits activity or growth of microorganism, but do not prevent infection.

Silver Ion Filter

UTR-FA16-5 / UTR-FA13-3 / UTR-FA03-5 / UTD-HFAA / UTD-HFRA / UTD-HFTA / UTD-HFTB / UTD-HFTC / UTD-HFNC / UTD-HFNB / UTD-HFNA / UTD-HFND / UTD-HFKB / UTD-HFKA



NEW



For Wall mounted / Floor
UTR-FA16-5 / UTR-FA13-3
UTR-FA03-5

For Cassette
UTD-HFAA / UTD-HFRA


For Duct
UTD-HFTA / UTD-HFTB
UTD-HFTC / UTD-HFNC
UTD-HFNB / UTD-HFNA
UTD-HFND / UTD-HFKB
UTD-HFKA

The Silver ion filter helps to keep indoor air free from viruses, bacteria and molds.

(Not a result of experiments in an actual use environment. Silver ion filter inhibits activity or growth of microorganism, but do not prevent infection.)

The silver ion filter inhibits the activities of viruses*1, bacteria*2 and molds*3 trapped on the filter.

(Only effective when the microorganism is trapped on the filter with dust or droplet)

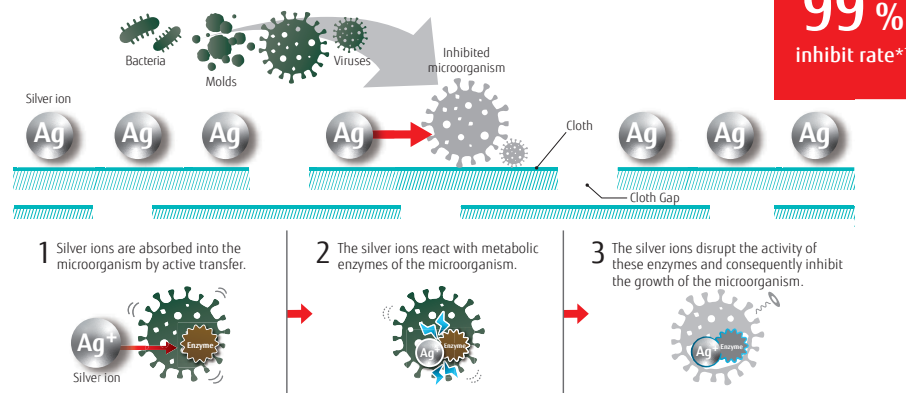

*1 [Testing organization] Kitasato Research Center for Environmental Science [Test Report] No. 2020_0408 [Test virus] Escherichia coli phage Qbeta NBRC 20012 (1 type) [Test Method] Based on the antiviral test method for textile products (JIS L 1922) [Test results] Inhibited by at least 99% in 24 hours. Not tested to prevent transmission of SARS-CoV-2.

*2 [Testing organization] Kitasato Research Center for Environmental Science [Test Report] No. 2020_0409 [Test bacteria] Escherichia coli NBRC 3972 (1 type) [Test Method] Based on the determination of antibacterial activity and efficacy of textile products (JIS L 1902) [Test results] The growth of the test bacteria was inhibited by 24 hours testing

*3 [Testing organization] Kitasato Research Center for Environmental Science [Test Report] No. 2020_0410 [Test fungi] Aspergillus Niger NBRC 105649 and other fungi (3 types) [Test Method] Based on the test for fungus resistance (JIS Z 2911) [Test results] The growth of the fungus was inhibited by 28 days testing

The filter is easily removable* and hand-washable.

(*Wall mounted and floor models only)



*4 Hand-washing or vacuuming by 3 months is recommended. Cleaning frequency varies depending on the environment of use.

Specifications

Model name	For Wall mounted / Floor			for Cassette		
	UTR-FA16-5	UTR-FA13-3	UTR-FA03-5	UTD-HFAA	UTD-HFRA	
Net Dimension (H × W × D)	mm	35 × 210 × 6	50 × 364 × 6	43 × 272 × 6	350 × 125 × 6	550 × 136 × 6
Weight	g	2	2	2	7	23
Quantity		2	2	2	1	1

Model name	for Duct									
	UTD-HFTA	UTD-HFTB	UTD-HFTC	UTD-HFNC	UTD-HFNB	UTD-HFNA	UTD-HFND	UTD-HFKB	UTD-HFKA	
Net Dimension (H × W × D)	mm	290 × 70 × 6	390 × 70 × 6	290 × 70 × 6 390 × 70 × 6	620 × 88 × 6	420 × 88 × 6	620 × 88 × 6	500 × 79 × 6	420 × 125 × 6	620 × 108 × 6
Weight	g	6	8	10	8	10	16	12	16	20
Quantity		2	2	3	1	2	2	2	2	2

Auto louver grille kit

UTD-GXTA-W/UTD-GXTB-W/UTD-GXTC-W




The optional clean-looking flat Auto louver grille kit blends into any interior and provides a comfortable airflow.




Flexible Control

- The Auto louver grille of the indoor unit can be operated in conjunction with the remote control of the indoor unit.
- Vertical auto swing**
 - Auto airflow direction and auto swing
 - 4 steps selectable
- Auto-closing louver**
 - The louvers will automatically close when the indoor unit stops operating.

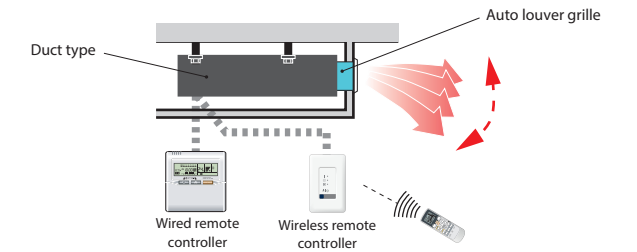

Dimensions

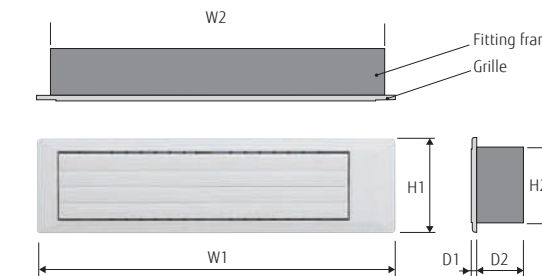

Model name	W1	W2	H1	H2	D1	D2
UTD-GXTA-W	683	645	180	148	9	84
UTD-GXTB-W	883	845	180	148	9	84
UTD-GXTC-W	1,083	1,045	180	148	9	84

Unit: mm

Specifications

Model name	UTD-GXTA-W	UTD-GXTB-W	UTD-GXTC-W		
Applicable indoor unit	ARYG07/09LLTA ARYG12/14LLTB ARXD007/009/012/014GLEH (for VRF) ARXK004/007/009/012/014GLEH (for VRF) ARXD04GALH (for VRF)	ARYG18LLTB ARXD018GLEH (for VRF) ARXK018GLEH (for VRF)	ARXD024GLEH (for VRF) ARXK024GLEH (for VRF)		
Power supply	Connecting with Control box of indoor unit				
Fixing Auto louver grille	Screwed to Flange or Square duct				
Extension Square duct limit	1.0 m (Max. duct length between indoor unit and Auto louver grille)				
Net Dimensions (H × W × D)	mm	180 × 683 × (84 + 9)	180 × 883 × (84 + 9)	180 × 1,083 × (84 + 9)	
Weight	Net	kg	2.0 (4.4)	2.5 (5.6)	3.0 (6.7)
	Gross	(lbs)	3.0 (6.7)	3.5 (7.8)	4.0 (8.9)
Color	White				
Louver motor	Stepping motor				
Accessories	Fitting Flame, etc.				
Operating range	Cooling	°C	18 to 32		
	Heating	% RH	80 % or less		
		°C	16 to 30		

Pressure sensor kit

UTY-SPWX




NEW




Design flexibility

The height difference between the outdoor unit and the indoor unit is normally 50 m for the V-III Series, but can be extended to 110 m by installing the Pressure sensor kit. (Can only be connected to the V-III Series. Also, it can only be connected to outdoor units using outdoor unit software compatible with the product.)

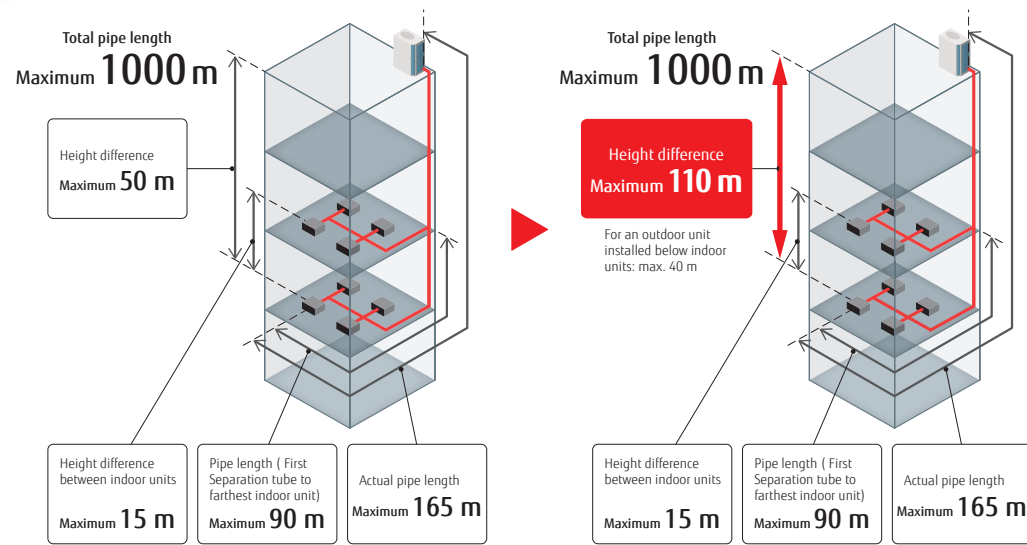

System overview

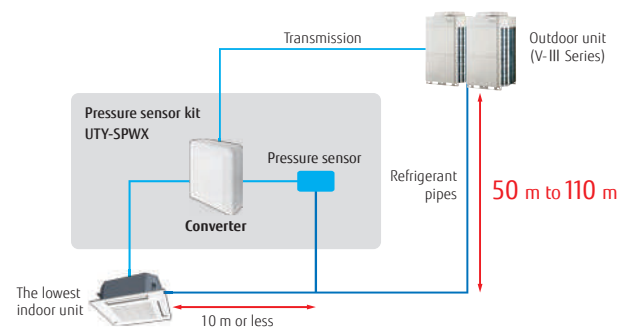

Pressure sensor kit

Pressure sensor kit (Converter)	Refrigerant pressure sensor	Joint pipe

Specifications

Model name	UTY-SPWX
Power supply	9 to 16 V DC
Dimensions (H × W × D) (mm)	140 × 117 × 43
Weight (g)	200

External power supply unit

UTZ-GXXC



NEW




The External power supply unit protects the increment in the system even if the power supply for some of the indoor units is shut down.

Connects to the External power supply unit to supply power to the indoor unit from the auxiliary power supply. This allows for continuous operation without system errors. Built-in relays reduce installation time and cost.

High reliability

- A: Interruption of the main power supply is detected by the power cut-off detection part.
- B: Supplies power for driving the expansion valve of the indoor unit. (12 V or 5 V DC)
- C: Gives notification of the power supply from the External power supply unit.

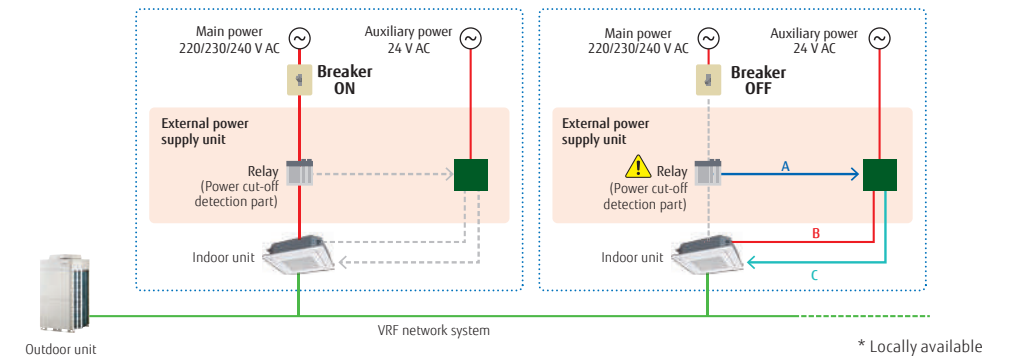

Note

- When changing the power supply voltage to 24 V AC, use a power transformer with an insulated structure that complies with the regulations* of the installation region.
- A powered-off indoor unit driven by the External power supply unit is treated in the same way as an operation-off unit in the electricity charge appointment function. If standby power is generated, the result of the electricity charge appointment may not be zero.

* UL Class II or IEC 61558 Class III, for example.

Specifications


Model name	UTZ-GXXC
Power supply	24 V AC 50/60 Hz
Dimensions (H × W × D) (mm)	97 × 200 × 178
Weight (g)	800

AIR BEAM Radiation air outlet unit


*Production by order
 Contact us for more details.



Key component



Cross-section view

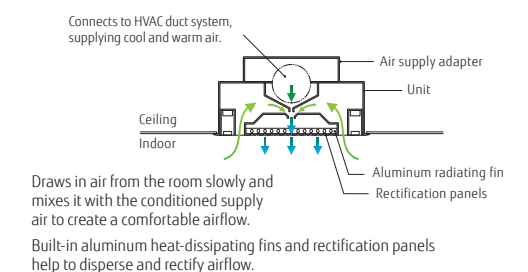

Airflow rate (m ³ /h)	180 (160-215)	270 (240-325)
Grid	600 × 2	600 × 3
AIR BEAM For system ceiling (Integrated type)	KS-180	KS-270

















Optional parts list for Split/Multi-split



Type	Refrigerant	Indoor unit										Indoor unit						
		Cassette		Duct				Duct				Floor	Ceiling	Wall-mounted	Multi-split			
		4-way flow Compact	Circular flow	Slim	Medium static pressure (Compact)	Medium static pressure (Standard)	High static pressure	Big	4-way flow Compact cassette	Mini duct	Slim duct				Floor ceiling			
		AUXG 09/12/14/ 18/22/24 KVLA	AUXG 18/22/24/ 30/36/45/54 KRLB	ARXG 09/12/14/18 KLLAP	ARXG 12/14/18/22/ 24/30/36/45/54 KHTAP	ARXG 22/24/30/36/45 KMLA	ARXG45/54KHTA					AGYG 09/12/14 KVCA	ABYG 18/22/24/30/ 36/45/54 KRTA	ASYG 07/09/12 KPCA	AUXG07KVLA	ARXG 07/09/12/14/18 KSLAP	ARXG07KLLAP	
							ARYG45/54/60LHTA			ARYG72/90LHTA					AUYG07/09LVLA	ARYG07/09LSLAP	ARYG07/09LLTA	ABYG14LVTA
Human sensor kit			• UTY-SHZXC															
Remote sensor unit	 The remote sensor provides additional convenience.				• UTY-XSZX					• UTY-XSZX						• UTY-XSZX		
Cassette grille		• UTG-UFYF-W	• UTG-UKYA-W, UTG-UKYC-W, UTG-UKYA-B											• UTG-UFYF-W (KVLA), UTG-UFYD-W (LVLA)				
Auto louver grille kit				• UTD-GXTA-W (09/12/14) UTD-GXTB-W (18)												• UTD-GXTA-W (07/09/12/14), UTD-GXTB-W (18)		
Long-life filter					• UTD-LFNA (36/45/54) UTD-LFNB (18/22/24/30) UTD-LFNC (12/14)	• UTD-LF25NA	• UTD-LF60KA (45/54)			• UTD-LFKA								
Flange						• UTD-SF04ST UTD-RF204												
Drain pump unit						• UTZ-PX1NBA				• UTZ-PX1NAB			• UTR-DPB24T					
Wide Panel			• UTG-AKXA-W															
Panel spacer			• UTG-BKXA-W															
Fresh air intake kit	 For Compact cassette For Cassette type	• UTZ-VXAA	• UTZ-VXRA												• UTZ-VXAA			
Air outlet shutter plate	 For Compact cassette For Cassette type	• UTR-YDZB	• UTR-YDZK												• UTR-YDZB			
Insulation kit for high humidity	 For Compact cassette Series/ Cassette type	• UTZ-KXGC	• UTZ-KXRA												• UTZ-KXGC			
Half concealed kit	 Used to half conceal a floor type indoor unit in the wall.										• UTR-STA							
L-type piping kit													• UTP-FX24A (18/22/24) UTP-FX35A (30/36/45/54)					
Remote controller holder															• UTZ-RXLA			

Optional parts list for VRF



Type	Refrigerant	Indoor unit																			Outdoor unit										
		Cassette								Duct						Indoor unit															
		One-way flow	3D flow	Compact grid type/ Standard type	Slim type		Large type		Slim type	Large type	Low static pressure duct			Medium static pressure			High static pressure		Floor	external EEV		Floor/Ceiling	Ceiling	Wall-mounted							
					4-way flow		Circular flow				Mini (With drain pump)	Slim (With drain pump)	Slim High-efficiency	Normal	High-efficiency		Normal	High-efficiency						-	-	-	-	-	external EEV	-	-
	AUXV 004/007/009/ 012/014/018/ 024GLEH	AUXS 018/024GLEH	AUXB 004/007/009/ 012/014/018/ 024GLEH	AUXD 18/24GALH	AUXA 18/24/30/ 36/45/54 GALH	AUXN 009/012/014 GLAH, AUXM 018/024/030 GLEH	AUXK 018/024/030/ 034/036/045/ 054GLEH	ARXX 004/007/009/ 012/014/018/ 024GLGH	ARXD 04GALH	ARXD 007/009/012/ 014/018/024 GLEH	ARXP 009/012/ 014/018 GLAH	ARXA 024/030/ 036/045 GLEH	ARXQ 018/024GTAH	ARXP 024/030GTAH	ARXC 036/072/ 090/096 GTEH	ARXC 45/60GATH	ARXQ 030GTAH	ACYA 004/007/ 009/012/014 GCGH	ACYE 004/007/ 009/012/014 GCEH	ABYA 012/014/ 018/024 GTEH	ABYA 030/36/ 045/054 GTEH	ASVA 004/007/009 012/014 GCGH	ASVE 004/007/009 012/014 GCEH	ASVA 18/24G8CH	ASVA 030/034GTEH	V-III V-III TROPICAL Series					
	Human sensor kit									●	UTY-SHZXC																				
Remote sensor unit																															
Cassette grille																															
Auto louver grille kit																															
Long-life filter																															
Flange																															
Drain Pump Unit																															
Wide Panel																															
Panel spacer																															
Fresh air intake kit*1																															
Air outlet shutter plate																															
Insulation kit for high humidity																															
Half concealed kit																															
External power supply unit																															
Pressure sensor kit																															

Function list for VRF



External input and output function/External connect kit

Type	Refrigerant	Indoor unit														Indoor unit								Outdoor unit						controller		Other							
		Cassette														Duct								Wall-mounted								J-IVL	J-IV	J-IVS	V-III	V-III Tropical	VR-IV	Central remote controller	RB unit
		One-way flow		3D flow		Compact grid type/Standard type		Slim type		Large type		Slim type		Large type		Low static pressure		Medium static pressure		High static pressure		Floor		Floor/Ceiling		EEV external													
		4-way flow	Circular flow	Mini (With drain pump)	Slim (With drain pump)	Slim High-efficiency	Normal	High-efficiency	Normal	High-efficiency	Normal	High-efficiency	EEV external	EEV external	High static pressure	High static pressure	High static pressure	High static pressure	High static pressure	High static pressure	High static pressure	High static pressure	High static pressure	High static pressure	High static pressure	High static pressure													
AUXV 004/007/009/ 012/014/018/ 024GLEH	AUXS 018/024 GLEH	AUXB 004/007/009/ 012/014/018/ 024GLEH	AUXD 18/24GALH	AUXA 18/24/30/ 34/36/45/54 GALH	AUXN 009/012/014 GLAH, AUXM 018/024/030 GLEH	AUXK 018/024/030/ 034/036/045/ 054GLEH	ARXK 004/007/009/ 012/014/018/ 024GLEH	ARXD 007/009/012/ 014/018/024 GLEH, ARXD 04GALH	ARXP 009/012/ 014/018 GLAH	ARXA 024/030/ 036/045 GLEH	ARXO 018/024/ GTAH	ARXP 024/030/ GTAH	ARXC 036/072/090/ 096GLEH, ARXC 45/60GATH	ARXO 030GTAH	ACYA 004/007/ 009/012/014 GGH	ACYE 004/007/ 009/012/014 GCEH	ABYA 012/014/018/ 024GTEH	ABYA 030/036/045/ 054GTEH	ASYA 004/007/009/ 012/014 GGH	ASYE 004/007/009/ 012/014 GCEH	ASYA 18/24GBCH	ASYA 030/034GTEH	AJY 072/090/108/ 126/144/162 LELBH	AJY 040/045/054 LLELBH, AJY 040/045/054 LELBH	AJY 040/045/054 LCLBH	AJY 072/090/108/ 126/144/162 LALBH	AJY 072/090/108/ 126/144/162 LNLBH	AJY 090/108/126/144 GALBH	UTY-DCYZ2	UTP-RX01AH UTP-RX01BH UTP-RX01CH UTP-RX04BH UTP-RX08AH UTP-RX12AH									
Input	Operation/Stop	● UTY-XWZXZD ○ UTY-XWZXZB														● UTY-XWZXZD ○ UTY-XWZXZB																							
	All On/All Off																															● UTY-XWZXZ7 ○ UTY-XWZXZ8							
	Batch stop																							● UTY-XWZXZ6															
	Forced stop	● UTY-XWZXZD ○ UTY-XWZXZB														● UTY-XWZXZD ○ UTY-XWZXZB																							
	Emergency stop	● UTY-XWZXZD ○ UTY-XWZXZB														● UTY-XWZXZD ○ UTY-XWZXZB								● UTY-XWZXZ6								● UTY-XWZXZ7 ○ UTY-XWZXZ8							
	Forced thermostat off	● UTY-XWZXZE ○ UTY-XWZXZ7														● UTY-XWZXZE ○ UTY-XWZXZ7																							
	Low noise mode operation																							● UTY-XWZXZ6															
	Cooling/Heating priority																							● UTY-XWZXZ6								● UTY-XWZXZ6 ○ UTY-XWZXZB							
	Outdoor unit operation peak control																							● UTY-XWZXZ6															
	Power usage information from electricity meter																							● UTY-XWZXZF															
Output	Operation status	● UTY-XWZXZC														● UTY-XWZXZC								○ UTY-XWZXZ6								○ UTY-XWZXZA							
	Error status	● UTY-XWZXZC														● UTY-XWZXZC								○ UTY-XWZXZ6								○ UTY-XWZXZA							
	Indoor unit fan operation status	● UTY-XWZXZC														● UTY-XWZXZC																							
	Auxiliary heater output	● UTY-XWZXZC														● UTY-XWZXZC								● UTY-XWZXZC															
	Base pan heater																							● UTY-XWZXZ9						● UTY-XWZXZ9									

*2: The Touch panel controller has the functions of dry contact and voltage application, but the external connection kit described above is not necessary because the touch panel controller has an external input terminal block. ●: Dry Contact ○: Apply Voltage

Communication system

External connect kit	
For indoor unit UTY-XWZXZ7 UTY-XWZXZB UTY-XWZXZC	For outdoor unit UTY-XWZXZD UTY-XWZXZE UTY-XWZXZ6 UTY-XWZXZ9 UTY-XWZXZF
For RB unit UTY-XWZXZ6 UTY-XWZXZB	Central remote controller UTY-XWZXZ7 UTY-XWZXZ8 UTY-XWZXZA
For Touch panel controller UTY-XWZXZA	

Separation tube



For SPLIT/MULTI-SPLIT/SIMULTANEOUS MULTI-SPLIT

Separation tube		Branch box	
UTP-SX236A/UTP-SX254A For 3-phase simultaneous multi-split UTP-SX272A For Simultaneous multi-split Twin/ Triple/Double Twin 	UTP-SX354A For 3-phase simultaneous multi-split UTP-SX372A For Simultaneous multi-split Twin/ Triple/Double Twin 	UTP-SX248A For 8-unit multi-split Liquid pipe Gas pipe 	UTP-PY03A UTP-PY02A For 8-unit multi-split 3-zone type 2-zone type



for VRF

Separation tube			
UTP-AX054A Gas pipe Liquid pipe 	UTP-AX090A Gas pipe Liquid pipe 	UTP-AX180A Gas pipe Liquid pipe 	UTP-AX567A Gas pipe Liquid pipe
UTP-BX090A Suction Gas pipe Discharge Gas pipe Liquid pipe 	UTP-BX180A Suction Gas pipe Discharge Gas pipe Liquid pipe 	UTP-BX567A Suction Gas pipe Discharge Gas pipe Liquid pipe 	UTP-LX180A For DX kit

Header

UTR-H0906L/UTR-H1806L Gas pipe Liquid pipe 	UTR-H0908L/UTR-H1808L Gas pipe Liquid pipe 	UTP-J0906A/UTP-J1806A Suction gas pipe Discharge gas pipe Liquid pipe 	UTP-J0908A/UTP-J1808A Suction gas pipe Discharge gas pipe Liquid pipe
--	--	--	--

Outdoor unit branch kit

Outdoor unit branch kit		Separation tube for RB unit	
UTP-CX567A Gas Pipe Liquid Pipe 	UTP-DX567A Suction Gas Pipe Discharge Gas Pipe Liquid Pipe 	UTP-EX060A Gas Pipe Liquid Pipe 	UTP-EX096A Gas Pipe Liquid Pipe

for VRF

EV kit
Model name \leq 09: UTR-EV09XB Model name \geq 12: UTR-EV14XB for compact wall-mounted type

RB unit			
UTP-RX01AH/UTP-RX01BH/ UTP-RX01CH Single type 	UTP-RX04BH Multi-split type 	UTP-RX08AH Multi-split type 	UTP-RX12AH Multi-split type

Specifications

Separation tube

Model name	UTP-AX054A	UTP-AX090A	UTP-AX180A	UTP-AX567A
Total cooling capacity of indoor unit (kW)	19.6 or less	28.0 or less	28.1 to 56.0	56.1 or more

Model name	UTP-BX090A	UTP-BX180A	UTP-BX567A
Total cooling capacity of indoor unit (kW)	28.0 or less	28.1 to 56.0	56.1 or more

Header

Model name	3-6 Branches	UTR-H0906L	UTR-H1806L
	3-8 Branches	UTR-H0908L	UTR-H1808L
Total cooling capacity of indoor unit (kW)	28.0 or less		28.1 to 56.0

Model name	3-6 Branches	UTP-J0906A	UTP-J1806A
	3-8 Branches	UTP-J0908A	UTP-J1808A
Total cooling capacity of indoor unit (kW)	28.0 or less		28.1 to 56.0

Outdoor unit branch kit

Model name	UTP-CX567A (for V-III/V-III Tropical)	UTP-DX567A (for VR-IV)
Number of outdoor units	2 outdoor units	1
	3 outdoor units	2

EV kit

Model name	UTR-EV09XB		UTR-EV14XB	
Application model	ASYE004GCEH ASYE007GCEH ASYE009GCEH	AGYE004GCEH AGYE007GCEH AGYE009GCEH	ASYE012GCEH ASYE014GCEH	AGYE012GCEH AGYE014GCEH

RB unit

Type	Single type				Multi-split type		
	Model name	UTP-RX01AH	UTP-RX01BH	UTP-RX01CH	UTP-RX04BH	UTP-RX08AH	UTP-RX12AH
Power source	V/Ø/Hz	230/1/50					
Input power	W	17	24	31	96	136	204
Number of branches		1	1	1	4	8	12
Maximum capacity of connectable indoor units (Q)	kW	Q \leq 8.0	Q \leq 18.0	Q \leq 28.0	Q \leq 56.1*1	Q \leq 72.0	Q \leq 95.0
Maximum capacity of connectable indoor units per branch (Q)	kW	Q \leq 8.0	Q \leq 18.0	Q \leq 28.0	Q \leq 18.0	Q \leq 8.0	Q \leq 8.0
Maximum Connectable Indoor Units per Branch		3	8	8	8	7	7
Dimensions (H × W × D)	mm	198 × 298 × 268			260 × 658 × 428	298 × 660 × 618	298 × 990 × 618

*1: When two RB units are connected in series (8 branches in total), the maximum capacity of the connectable indoor units is up to 56.0 kW.